

UKOTROSTFEDIT

Copy, No

Wolfs State

THE TISE A 2C.

CONTRACTOR BOTH BOTH BOTH

### BUSIER & JANGLE

OPERATION, BUSTER OME MEASUREMENTS OF SSURE≒TIME VS DISTANCE

B. F. Murphey, 5111

March 4. 1952

DISTRIBUTION STATEMENT A APPLIES

PER MATPR REVIEW.

CONTRACTOR OF STREET THE R


19950721 004

SANDIA CORPORATION ALBUQUERQUE, NEW MEXA

LAUCLASSIFIED



# DISCLAIMER NOTICE

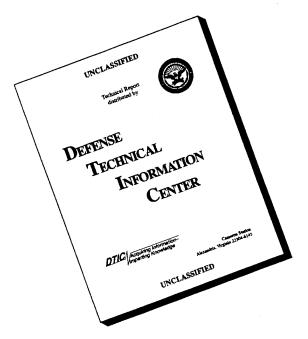

THIS DOCUMENT IS BEST QUALITY AVAILABLE. THE COPY FURNISHED TO DTIC CONTAINED A SIGNIFICANT NUMBER OF PAGES WHICH DO NOT REPRODUCE LEGIBLY.

COPY

Α

## Security Suformation.



SECRET S

OPERATION BUSTER
SOME MEASUREMENTS OF
OVERPRESSURE-TIME VS DISTANCE
FOR AIRBURST BOMBS

B. F. Murphey, 5111

March 4, 1952

## iii daga

#### RESTRICTED DATA

This decument complins bestry red date as defined in the Atomie there is the standard of the standard of the displaying of his contents in anyth anier the society work and the desperance prohibited.

This document settle in every of Sandia Corporation and is only lidaned to the recipient of thus to returned to the Sandia Corporation Documents Roomstoon request or when no longer needed.

\_This document consists of 130 pages
No. 51 of 300 copies, series A

SANDIA CORPORATION

SECURITY INFORMATION SECRET

UNCLASSIFIED






#### ACKNOWLEDGMENT

Measurements of pressure vs time on Operation Buster were suggested by a number of persons. That they be carried out by Sandia Laboratory was suggested by E. F. Cox, and these measurements were executed under his general supervision. The layout was designed by G. T. Pelsor, M. L. Merritt, and B. F. Murphey and reviewed with W. E. Ogle, F. B. Porzel, and E. J. Zadina of Los Alamos Scientific Laboratory.

Measurements at the Buster Site were carried out by Division 5233 of Sandia Laboratory under the supervision of H. E. Lenander and R. S. Millican; George Reis was responsible for placement and calibration of the pressure gauges. Recording equipment was installed and operated by O. K. Kowallis with the assistance of Allen Korbe, ETI, USN, and William Payne, RD, USN; V. V. Myers was responsible for cabling and timing.

Data were processed from wriggles on paper to tabular form by the Data Reduction Division of Sandia Laboratory.

10098	sion For	Sec.
MIIS	GRA&I	Q
DTIC	TAB	
	cunced	
Just 1	fication.	
Ву		
Distr	ibution/	
Avai	lability	Codes
	Avail an	d/or
Diet	Specia	2.
1/1		
L.		
	f	




UNCLASS



#### CONTENTS

	Page
ummary	11
The ExperimentDetermination of Points for Height-of-Burst Chart	12
esultsLow Peak Pressures and Unconventional Shock-Wave Forms	16
Shot Baker Shot Charlie Shot Dog Shot Easy All Shots	20 20 22 22 22
iscussionDetailed Examination of Findings and Previous Concepts	23
ecommendations for Future Studies	32
ppendix A	33
ppendix B	123
ist of References	125





#### LIST OF ILLUSTRATIONS

				Page
Fig.	1	<del>-</del> -	Site plan	13
Fig.	2.		Ground baffle	14
Fig.	3.		15-ft pipe stations	14
Fig.	4.		Base of a 50-ft tower	15
Fig.	5.		View of 50-ft tower	15
Fig.	6.		Shot Baker (assumed yield 3.1 kt) (height of burst 1,118 ft)	17
Fig.	<sup></sup> 7.		Shot Charlie (assumed yield 14 kt) (height of burst 1,111 ft)	18
Fig.	8.		Shot Easy (assumed yield 30.5 kt) (height of burst 1,314 ft)	19
Fig.	9.		Peak overpressure vs slant range	21
Fig.	10.	- <b>-</b>	Duration of positive phase vs slant range	24
Fig.	11.		Arrival time vs slant range	25
Fig.	12.		Reflection chart	26
Fig.	13.		Free air overpressure vs slant range	27
Fig.	14.		Height-of-burst curve	31
Fig.	15.		Shot Baker (A3S)	41
Fig.	16.		Shot Baker (B3S)	42
Fig.	17.		Shot Baker (B315L)	43
Fig	1.8		Shot Baker (B315R)	44





#### LIST OF ILLUSTRATIONS (Cont)


						rage
Fig.	19.	S	Shot 1	Baker (CS)		45
Fig.	20.	S	Shot I	Baker (C15R)		46
Fig.	21.	- <b>-</b> S	Shot I	Baker (C15L)		47
Fig.	22.	S	Shot ]	Baker (B2S)		48
Fig.	23.	S	Shot I	Baker (B215R)		49
Fig.	24.	S	Shot I	Baker (B215L)		50
Fig.	25.	S	Shot I	Baker (DS)		51
Fig.	26.	S	Shot I	Baker (D15L)		52
Fig.	27.	S	Shot ]	Baker (D15R)		53
Fig.	28.	- <b>-</b> S	Shot 1	Baker (A2S)	·	54
Fig.	29.	S	Shot 1	Baker (ES)		55
Fig.	30.	- <b>-</b> S	Shot 1	Baker (E15L)		56
Fig.	31.	- <b>-</b> S	Shot I	Baker (E15R)		57
Fig.	32.	- <b>-</b> S	Shot I	Baker (FS)		58
Fig.	33.	S	Shot ]	Baker (F15R)		59
Fig.	34.	S	Shot 1	Baker (GS)		60
Fig.	35.	S	Shot 1	Baker (HS)		61
Fig.	36.	S	Shot l	Baker (IS)		.62
Fig.	37.	S	Shot I	Baker (JS)		63
Fig.	38.	S	Shot (	Charlie (A3S)		67
Fig.	39.	S	Shot (	Charlie (B3S)		68
Fig.	40.	S	Shot (	Charlie (B3'15L)		69
Fig.	41.	S	Shot (	Charlie (B315R)		70
Fig.	42.	S	Shot (	Charlie (CS)		71
Fig.	43.	S	Shot (	Charlie (C15L)		72






#### LIST OF ILLUSTRATIONS (Cont)

	Page
Fig. 44 Shot Charlie (C15R)	73
Fig. 45 Shot Charlie (B2S)	74
Fig. 46 Shot Charlie (B215L)	75
Fig. 47 Shot Charlie (B215R)	` 76
Fig. 48 Shot Charlie (A2S)	77
Fig. 49 Shot Charlie (DS)	78
Fig. 50 Shot Charlie (D15L)	79
Fig. 51 Shot Charlie (D15R)	80
Fig. 52 Shot Charlie (ES)	81
Fig. 53 Shot Charlie (E15L)	82
Fig. 54 Shot Charlie (E15R)	83
Fig. 55 Shot Charlie (FS)	84
Fig. 56 Shot Charlie (F15R)	85
Fig. 57 Shot Charlie (GS)	86
Fig. 58 Shot Charlie (HS)	87
Fig. 59 Shot Charlie (IS)	88
Fig. 60 Shot Charlie (JS)	89
Fig. 61 Shot Dog (JS)	93
Fig. 62 Shot Easy (B2S)	97
Fig. 63 Shot Easy (B2P0)	98
Fig. 64 Shot Easy (B2P5)	99
Fig. 65 Shot Easy (B2P10)	100
Fig. 66 Shot Easy (B2P25)	101
Fig. 67 Shot Easy (B2P50)	102
Fig. 68 Shot Easy (CS)	103





#### LIST OF ILLUSTRATIONS (Cont)


* :		Page
	69 Shot Easy (C15R)	104
Fig.	70 Shot Easy (C15L)	105
Fig.	71 Shot Easy (B3S)	106
Fig.	72 Shot Easy (A3S)	. 107
Fig.	73 Shot Easy (DS)	108
Fig.	74 Shot Easy (DP0)	109
Fig.	75 Shot Easy (DP5)	110
Fig.	76 Shot Easy (DP10)	111
Fig.	77 Shot Easy (DP25)	112
Fig.	78 Shot Easy (DP50)	113
Fig.	79 Shot Easy (ES)	114
Fig.	80 Shot Easy (E15L)	115
Fig.	81 Shot Easy (E15R)	116
Fig.	82 Shot Easy (FS)	117
Fig.	83 Shot Easy (F15R)	118
Fig.	84 Shot Easy (GS)	119
Fig.	85 Shot Easy (IS)	120
Fig.	86 Shot Easy (JS)	121

Novemoverpragion as Bak designata for accompact accompac

were exthe tar; perime burst himinimu given sincreas heights

A lor an a been ob ments h These d have been use legard f

Du sombs a served if the shape meas



## OPERATION BUSTER SOME MEASUREMENTS OF OVERPRESSURE-TIME VS DISTANCE FOR AIRBURST BOMBS


Summary. -- The series of tests conducted at the Nevada Test Site from October 22 to November 5, 1951, was known as Operation Buster. This report deals with measurements of overpressure-time vs distance for airburst weapons. The tests included one tower shot and four air-dropped atomic bombs. The latter four were all nuclear bursts and were designated as Baker, Charlie, Dog, and Easy Shots. Relevant information was obtained for the shots designated Baker, Charlie, and Easy. Only one measurement was obtained for Dog Shot. Data for the first shot, Able, is mentioned briefly. Graphs of pressure vs time are included, accompanied by a discussion of the various observed wave forms. The most salient fact observed is that pressures were lower than had been expected.


\* \* \* \* \*

The only two atomic bombs which have been dropped in combat (Hiroshima and Nagasaki) were each set to explode at a height believed to maximize the amount of structural damage in the target areas. The selections of the appropriate heights were based on theory and on experiments. Interpretation of data from small high-explosive shots had shown that a bomb burst high over the target would impose pressures, equal to or greater than a preselected minimum pressure, upon a larger area than would a bomb burst near the ground. With a given size bomb the area covered by pressures exceeding a selected minimum pressure would increase with increasing height of burst up to a so-called 'optimum burst height'; for burst heights above this optimum the area covered by the same isobar would decrease rather rapidly with increasing height of burst.

At the time these bombs were detonated in Japan the only actual pressure measurements or an atomic bomb were those obtained at Trinity. Since then several measurements have been obtained for bombs burst within 300 feet of the earth's surface, and one set of measurements has been obtained for a bomb--Bikini Able--burst in the air at an altitude of 518 feet. These data and those from small high-explosive charges, shock-tubes, and theoretical studies, have been used to construct a chart now known as the height-of-burst chart. This chart shows he optimum burst height to maximize a given overpressure in the range 4 to 20 psi. It has been used extensively in connection with the preparation of target folders, perhaps without due tegard for the uncertainties expressed at the time of its publication.

During Operation Greenhouse it was established that shock waves associated with atomic combs are not necessarily precisely the same, at least near the ground, as shock waves observed in connection with high-explosive detonations. The slow rise time of the initial portion of the shock wave, coupled with the lack of pressure-distance data for airburst bombs, made the measurement of shock waves from bombs to be tested on Operation Buster of more than





ordinary interest. It was therefore decided to measure with some care the pressure-time curves for these bursts. These measurements, which turned out to be of somewhat greater interest than had been anticipated, are described in detail here.

The Experiment -- Determination of Points for Height-of-Burst Chart

Pressure-time vs distance measurements for Operation Buster were designed primari to check the height-of-burst tables used extensively in later publications 3,4. Actually the selected heights of burst for the predicted Buster yields were such that relatively high overpressures were 'optimized'. It was desirable to carry the measurements in close to ground zero to obtain measurements in the region of regular reflection.

In arranging the layout (Fig. 1) for the gauge stations, a gauge was actually placed at intended ground zero for the Baker, Charlie, and Dog Shots, for which the blast lines (Fig. 3 were primarily designed. To obtain sufficient data to estimate the in-close pressure distribution, the gauge stations were placed at 400-ft intervals out to 2,400 feet plus three additions tations out to 5,400 feet. The 'T' layout was chosen because of the possibility that either the of the T might be used as intended ground zero during the B, C, D series. This choice resulted in the gauges looking at different portions of the wave front. To some extent pressure distance data would be influenced by any asymmetric properites of the shock front. The primary surface-gauge installations were in a ground baffle; a macadam circle (or pad) of 10-ft radius surrounded the gauge. The macadam was 6 inches thick, and the gauge was mounted vertically in the center. A typical pad is shown in the final stages of preparation in Fig. 2.

Since the transition from regular to Mach reflection has heretofore entered so vitally into the whole notion of optimum heights of burst, an array of gauges was placed 15 feet above ground to identify this transition. These so-called 'pipe' stations were placed at 400-ft intervals from 400 to 2, 400 feet. The primary aim of the measurement was to find at which stations both incident and reflected waves could be observed and at which stations only the reflected (Mach) wave would be seen. An altitude of 15 feet above ground was deemed sufficient to give the required time resolution, provided the rise time of the shock wave was negligible compared with 10 to 25 msec. These pipes were oriented toward intended ground zero, and the gauge-bearing members were placed horizontally (Fig. 3). Two gauges were placed on each pipe, one on either side of the pipe in the horizontal plane. (A typical gauge position can be seen in Fig. 4.) In the region of regular reflection the incident wave struck the pipe at an unsatisfactory angle from the point-of-view of flow. However, after arrival of the reflected wave, and always in the Mach region, the flow should have been satisfactory. It was felt that unsatisfactory means of identifying transition.

The pressure-time curve apparently was measured with moderate accuracy in most instances. Although there were some violent oscillations which may represent unsteady flow, there was moderately good agreement between the gauges at 15 feet and those at the surface. There was also good agreement with the 50-ft pipes (Fig. 5), which were intended to measure pressure and arrival times vs altitude.

In choosing sensitivities of the gauges at each station use was made of predicted yields intended heights of burst, and height-of-burst tables 1,2. Sensitivities were chosen to allow for the highest predicted pressure and for a possible target miss of 400 feet. The recording system used (Appendix B) is capable of an over-all accuracy of better than 2 per cent. Taking into account the problem of reading back from the recording, the noise level is in the range of



sure-time /hat greater

irt .

ned primari Actually th y high overse to ground

y placed at lines (Fig. 3 sure distrihree addition that either the choice reent pressure at. The pripad) of 10-ft as mounted a in Fig. 2.

d so vitally
15 feet abov
t 400-ft inter
t which stanly the rened sufficien
as negligible
d zero, and
placed on
e position ca
he pipe at an
he reflected
was felt that
uge would be

y in most insteady flow, the surface. d to measure

licted yields sen to allow he recording cent. Takin n the range of

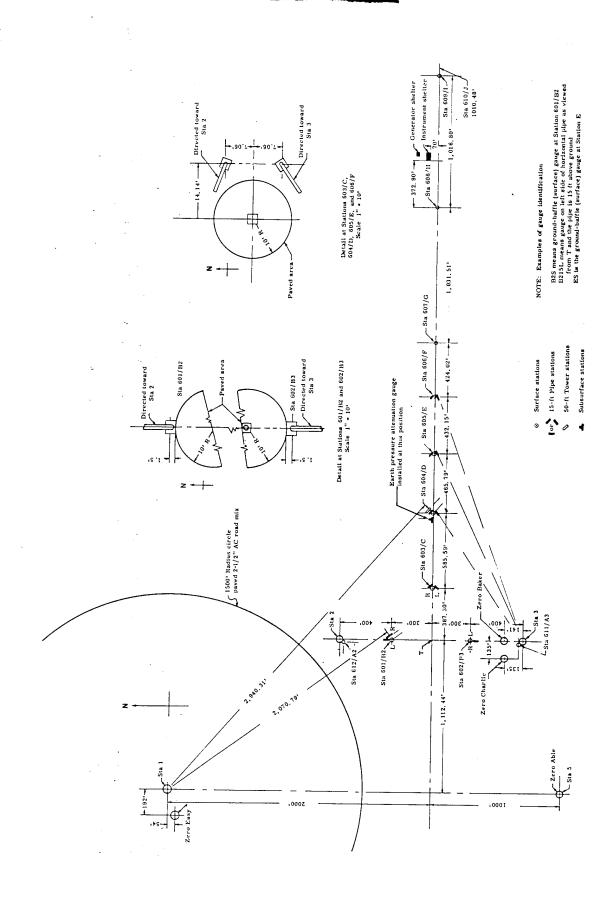




Fig. 2. -- Ground baffle

Final preparation of the 10-ft macadam pad for the surface gauge installation at Station A3S. The vertically mounted gauge was installed at the center of a concrete cube shown in the center of the pad. The pad, which was 6 in. thick, was somewhat buckled following the bursts.

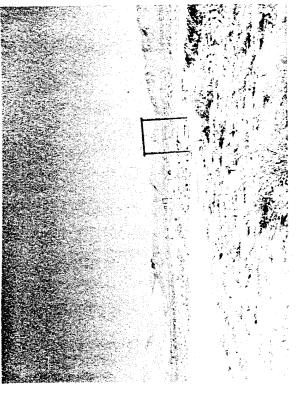


Fig. 3. -- 15-ft pipe stations

Looking east down the blast line, the 15-ft towers are pointing toward shot point 3, which is out of view at the right side of picture. One of the 10-ft ground baffle pads can be seen in front of the closest tower. The ditch, visible in foreground at right center, was filled prior to shot time. The towers shown are those at Stations C (in foreground), D, E, and F.



Fig. 4. -- Base of a 50-ft tower

The gauge hole at the 5-ft level can be seen at the top center of the picture. Although the 50-ft tower had a continuous concrete base, as shown, the 15-ft towers had separate concrete footings for each leg.


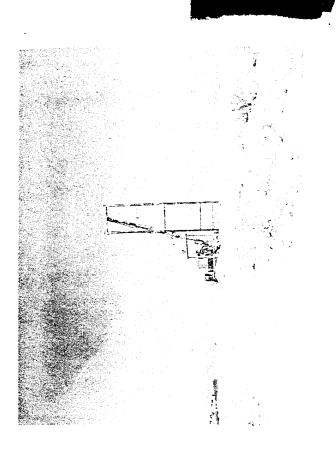


Fig. 5. -- View of 50-ft tower

This tower, oriented toward Shot Point 1 (out of field of view toward left), had gauges at elevations of 0, 5, 10, 25, and 50 ft.



1-2 per cent of the sensitivity. Actually peak amplitudes of pressures recorded were such (observed pressures were not full scale) that the accuracy is at best 5 per cent, and in the most interesting region (out to 2,400 feet) peak pressures may be regarded as having a poss ble error of 10 to 20 per cent. This latter error is judged from the scatter of points on the pressure-distance graphs. No recording system error leading to such a large estimate has been found. A few channels indicated on the pressure-time graphs (Appendix A) are obvious in greater error.

The over-all system is capable of responding to step transients within one msec. The gauges themselves are capable of faster responses.

Because recorded pressures are so low compared with predicted pressures, an effort was made to find any large errors. For example, there was considerable concern over a transient at zero time which forced all the galvanometers off scale, causing a slight permanent set in a few of them. All galvanometers from the two recorders were checked against the factory sensitivity and were accurate within the specified ±5 per cent. Gauge sensitivities have not yet been reviewed. (However, there is no reason to expect any changes, judging from experience at Greenhouse and one or two field checks made before Buster Easy.) Thus it is concluded that no gross errors occurred which would affect a large number of gauges.

On Shot Dog only one pressure-time curve was recorded because the timing signal staing the recording paper arrived 5 seconds late.

Results -- Low Peak Pressures and Unconventional Shock-Wave Forms


Peak pressures shown on the pressure-distance curves (Figs. 6, 7, and 8) were lower than anticipated. Predicted pressures were plotted from LA-743R, using the heights of bur and yields in Table I.


TABLE I

Shot	Height (ft)	Yield (kt)	$Ht/W^{1/3}$
Baker	1,118	3.1	765
Charlie	1,111	14.0	461
Dog	1,417	21.5	510
Easy	1,314	30.5	422

Examination of Figs. 6, 7, and 8 reveals that the data fall below the predictions in the range of military interest. At large distances observed and predicted peak pressures are more nearly in agreement. It seems conclusive that at large distances (but outside the range of us ful overpressures) the assumption of using twice the yield times some efficiency factor probably gives correct values of peak pressure. That is, viewed from a point somewhere beyon the gauge line, it might be deduced that the yields were as expected. This deduction, from extrapolating the curves, suggests that the assumption of low efficiency is not adequate to explain observed facts shown in Figs. 6, 7, and 8. It will be noted that interferometer gauge readings from points about two miles from the shots, added to Figs. 7 and 8, provide some basis for the extrapolation.


Copy available to DDC does not permit fully legible reproduction




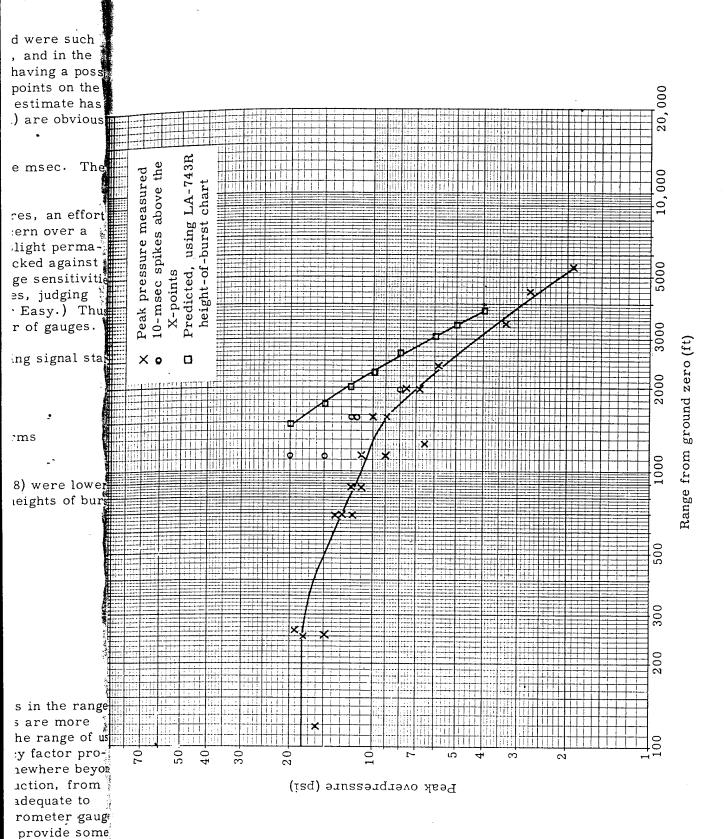

ig. 6. -- Shot Baker (assumed yield 3.1 kt) (height of burst 1,118 ft)





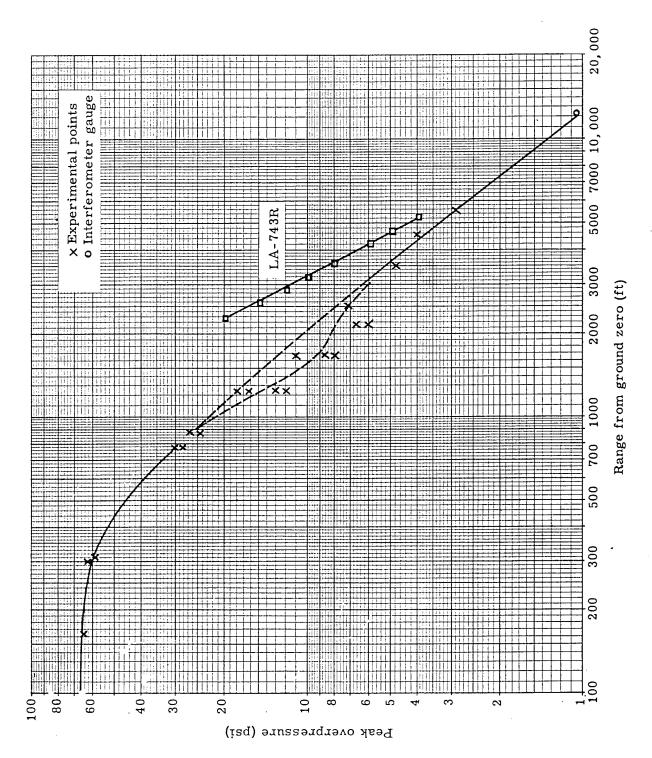

F-- Shot Charlie (assumed yield 14 kt) (height of burst 1, 111 ft)

Experimental point



20,000

5000 7000 10,000


2000 3000

500 700 1000


300

200

Range from ground zero (ft)

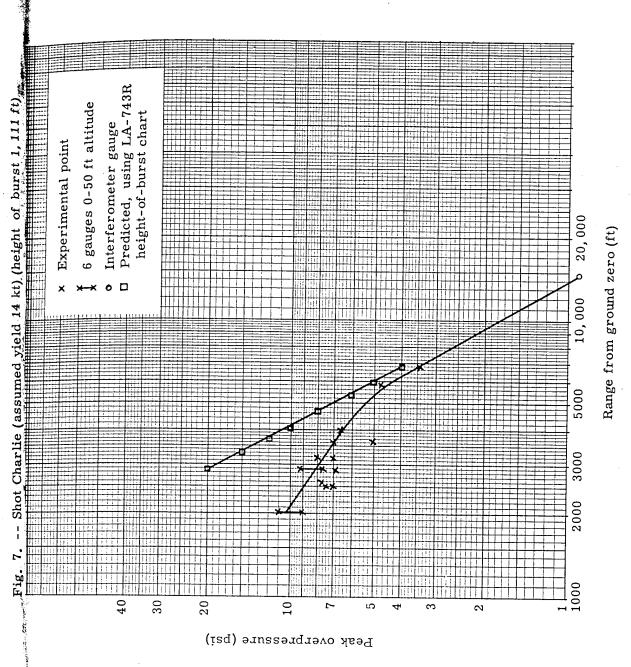

-- Shot Easy (assumed yield 30.5 kt) (height of burst 1,314ft) Fig. 8.



Differences between observed and predicted pressure-vs-distance curves can not be eplained simply by assuming a low yield, or a small percentage of the yield going into the black

Shot Baker. -- The pressure-time graphs for each shot are arranged in Appendix A is sequence according to range from ground zero. Except at gauge stations B2 and B3 the pip gauges are at the same range (or nearly so) as the ground-baffle gauges. (Figure 1 gives dails such as angles and station designations.)

Except possibly for stations B215L and B215R the shock has a rise time evidently limed only by the response of the measurement system for all gauges mounted 15 ft above ground. Ground baffle gauges show slower rise times (of the order of 10 msec) until the distant gauges are reached; there the recording system again limits rise time. Presumably this slow rise time is an effect of surface roughness; heating of the air near the ground, or possibly energy absorption resulting from work done on dust, or all three.

When their records have sharp rise times, the 15-ft gauges should give information of cerning transition from regular to Mach reflection. Figures 17-27 show that the incident and reflected waves arrive closer together until they are definitely merged at station D, 1,123 to from ground zero. Records from pipe stations D, E, and F indicate that the Mach stem has formed prior to arrival of the shock at station D. Moreover, data taken at D, E, and F on Baker are the only examples in which, at the 15-ft altitude, the peak pressures differ marked by from the lower pressures recorded by the surface gauges. The most interesting feature the larger reading, however, is that near the onset of Mach reflection, the higher pressure short-lived, dropping back to agreement with the surface gauge within about 10 msec. Evic from these few measurements, coupled with shock-tube observations, makes it apparent to the very high pressures attributed to Mach reflection near its onset are of short duration. Sumably whatever small amount of energy a spike on the 15-ft gauge record contains is completely absorbed in the region very close to the ground, since the ground gauges do not show the short-duration peaks. That the Mach effect contributes to higher pressures beyond this region of onset is apparent when pressure values are plotted on a height-of-burst chart.


Pressure-time curves for the pipe stations closer than 1,100 feet indicate that there might be a flow problem. Pressure observed for the incident wave drops rapidly, becoming negative in some instances, and apparently fails to reach the proper peak value for the incidence. The flow problem is not serious for the reflected wave, especially once the Mack stem is formed and flow becomes nearly horizontal. The basis on which validity of the pressure-time curves for the pipe gauges is assumed is that their readings agree moderately we with those from the surface gauges after the reflected wave has combined with the incident wave.

Peak pressures are plotted against range from actual ground zero in Fig. 6 and against range in Fig. 9. Figure 9 contains data from surface gauges only, whereas peak pressures from all gauges are plotted in Fig. 6. Data from the gauge at station ES do not appear in either; they appear unreliable for this shot.

Discussion of the pressure-distance curves will be delayed until data from other shots are presented.

Shot Charlie. -- Though data from Shot Baker may be a little low compared with expectations, the pressure-time curves do have a reasonable resemblance to the one published in Effects of Atomic Weapons. However, as can be seen from the pressure-time records for Shot Charlie (Figs. 38-60, Appendix A) recordings at stations B315L and B315R show sharp rise times and reasonable elapsed time (18.4 msec) between incident and reflected waves. Data from stations B215L and R and C15L and R indicate that distinction between the





s can not be e

Appendix A in and B3 the pip gure 1 gives d

evidently lim above ground e distant gau this slow rise possibly ener

information of the incident and ion D, 1,123 Which stem has E, and F on sting feature there pressure of the incident inc

te that there day, becoming the for the incommon once the Machity of the present moderately we the incident

g. 6 and again eas peak pres S do not appea

om other shot

ered with exe one published time records 8315R show and reflected ion between


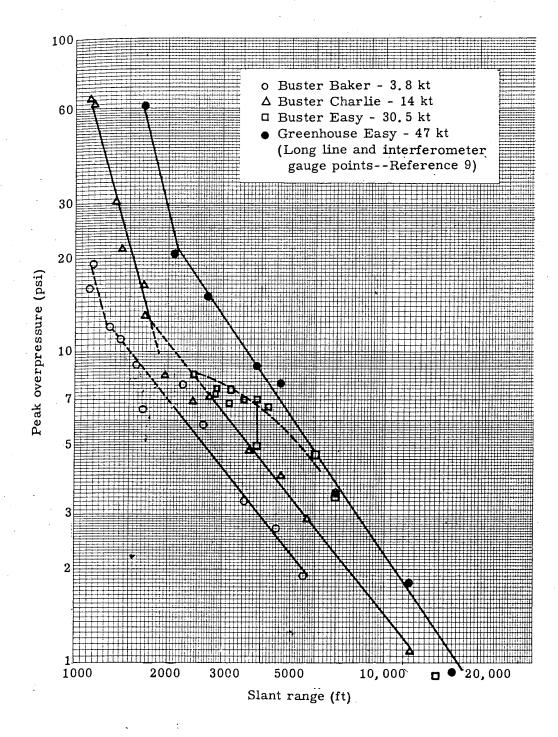


Fig. 9. -- Peak overpressure vs slant range





arrivals of incident and reflected waves is still possible, but superimposed on these reco is a much grosser feature which appears also on that from the ground-baffle gauge. This int than step, which is graphically illustrated at Station A2S, is still apparent 2,500 feet from growercep zero. Station DS had the same slant range as A2S but differed in azimuth by 550. This sec. 11. like feature appears to develop beyond 300 feet from ground zero and is partially developening g at 800 feet (Stations B2S and CS). Also, beyond C very slow rise times appear. From offit into experience with Shot Baker it is evident that there is no hope of discerning onset of Mach mended flection. Something obviously happened to the shock wave on Shot Charlie that did not hap to the shock wave associated with Shot Baker. Appen

Violent oscillations in pressure occurred at several of the gauge stations. The explot resu ence on Shot Baker suggests that the flow problem is not serious enough to cause these osom an i tions. A satisfactory explanation of the irregular records has not been made. Apparently gauge 'saw' the 'wiggles', whatever their cause. Since the gauge is sensitive to accelera to some extent (an acceleration of 30 g causes about 1 per cent error for a 30-psi gauge) oscillations might be caused by accelerations rather than pressure variations. The frequency of oscillations appears too high to be attributed to the pipe standards, however, and in the most serious examples, at Stations ES, E15L, and E15R, both the pipe and the ground ba gauges show the effect. ermine

Th€

In Sh

The 1

Shot Charlie differs from Shot Baker in that slow rise times are exhibited after the se que few hundred feet of travel. These slow rise times exist up to fifteen feet in height and accestiona for the absence on Shot Charlie of the high peaks observed at Stations D, E, and F on Sho Baker.

Shot Dog. -- Only one pressure-time curve is available from Shot Dog. A peak over pressure of 3.5 psi was observed at 5,450 feet.

Shot Easy. -- The gauge line was not designed to cover Shot Easy in the same manif as the previous three shots, the closest station being at 2,030 feet. Slow rise times were served out to 5,860 feet except for one of the 50-ft towers. Data for the 50-ft tower at 2 feet have the appearance at all levels of having the peak chopped off for half the positive  $rac{\eta}{k}$ rise times are slow at all levels. These 50-ft stations are examined more thoroughly els where. 5 Peak pressures observed up to 50 feet were only slightly higher than those observed using ground baffle. This is true at both Stations D and B2. Inste

Whether as a result of asymmetry of the shock front, or errors, large variance ma the remaining data unsatisfactory from the point of view of plotting an accurate pressure. distance curve.

All Shots. -- Peak overpressure vs slant range for all shots is plotted in Fig. 9, w some data from Greenhouse Easy Shot. 9 Cursory examination shows some deviation from Greenhouse data. Buster Shots Charlie and Easy look as though the 7-10-psi region does extend far enough in range. Data from Charlie show that the shock waves suffer some so eems r deterioration after traveling a few hundred feet, and those from Easy show similar behave haps a at Station B2. <u>ř</u>e is no

It has been hypothesized that a thermal layer is formed near the ground, causing re peak pressures. Presumably this thermal layer would be more effective for Shots Charles, ang and Easy than for Shot Baker since the yields were greater and the burst heights were not he lates respondingly greater. The data indicate that the peak pressure is influenced to heights of to 50 feet above the ground. It is also possible that some energy is taken from the shock by transporting dust. Shot Baker also would be less affected from this cause since the g kt yiel had not been loosened by previous shots.





sed on these red Positive durations are plotted in Fig. 10. These are subject to error to a greater exaffle gauge. The than are the peak pressures because the noise level causes difficulty in choosing the zero 500 feet from garcepts in regions of low-pressure readings. Arrival times vs slant range are plotted in th by 55°. This 11. Errors occurred here because a zero time transient burned out the 2-kc standard partially develoing galvanometer in some recorders. It was necessary then to rely upon the timing trace appear. From into the two recorders. Elapsed times are therefore not accurate to 1/2 msec as it was ing onset of Macinded they should be, but may be in error by as much as 1 per cent. ie that did not ha

A summary of the results of each shot, with graphs of the pressure-time curves, appears ppendix A. Data from Shot Able are not included since they are not applicable to nuclear stations. The extresults; however, pressures agree approximately with those which would be expected . to cause these an HE explosion of 2.9 tons.

Discussion -- Detailed Examination of Findings and Previous Concepts

The intent of the Buster program measurements of air overpressure vs distance was to irmine the extent to which height-of-burst curves might require modification. Most of xhibited after the questions were raised in LA-743R and required checking at the first opportunity. Some et in height and a tionable aspects of these curves were:

> The percentage of yield going into air blast Reflection coefficients at large distances from the source Reflection coefficients in the region of change from regular to Mach reflection (these had been based on intelligent guessing rather than direct measurement, especially for nuclear explosions) The degree to which advantages of Mach reflection should be assumed in the pressure vs distance phenomenon, especially as regards military damage

Greenhouse measurements showed slow rise times occurring near ground zero. It was ore thoroughly elear that this effect would necessarily be observed for airburst weapons.

Instead of providing detailed answers to the questions posed above, the Buster measurelarge variance n shave directed attention to some new problems. Buster shots showed:

> Low pressures, especially near ground zero Slow rise times on two of the three shots, with peculiar shock wave forms

ne deviation from In Shot Baker, the first shot over the ground zero designated as Station 3, although preses suffer some s are low, the rise times are fast for the gauges mounted 15 feet above ground level. Thus ems reasonable to examine the data for this shot carefully in relation to the original intent. aps a low percentage of yield going into the blast might explain the low pressures since e is no evidence of serious deterioration of the peak pressures. The procedure followed assume that the reflection chart (Fig. 12) is correct and from the known reflected prestheights were negative for Shot Baker. s, angles of incidence, and slant ranges to construct a free air (incident) pressure curve

en from the shoc. The results of this calculation are presented in Fig. 13, with the free air curve for a cause since the tributes of this calculation as product of the yield going into the blast). Since the curve does not parallel

made. Apparen nsitive to accele ra 30-psi gaug ations. The free owever, and in t and the ground

: Dog. A peak of

, E, and F on Sh

in the same ma w rise times we ≥ 50-ft tower at 2 half the positive

ccurate pressure

otted in Fig. 9,

round, causing

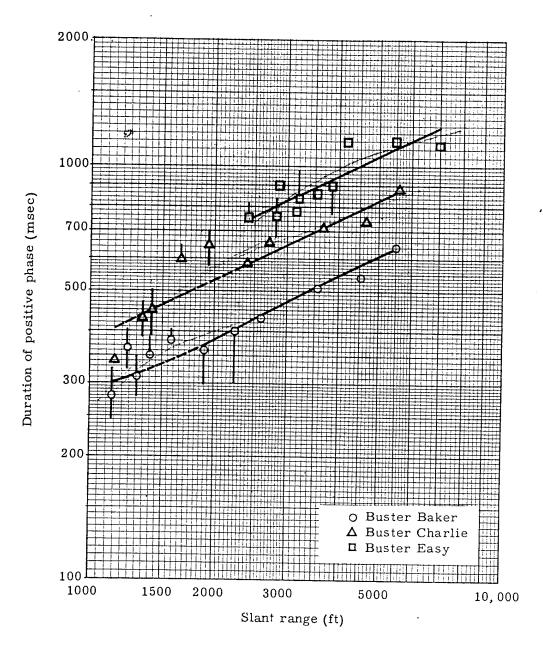



Fig. 10. -- Duration of positive phase vs slant range



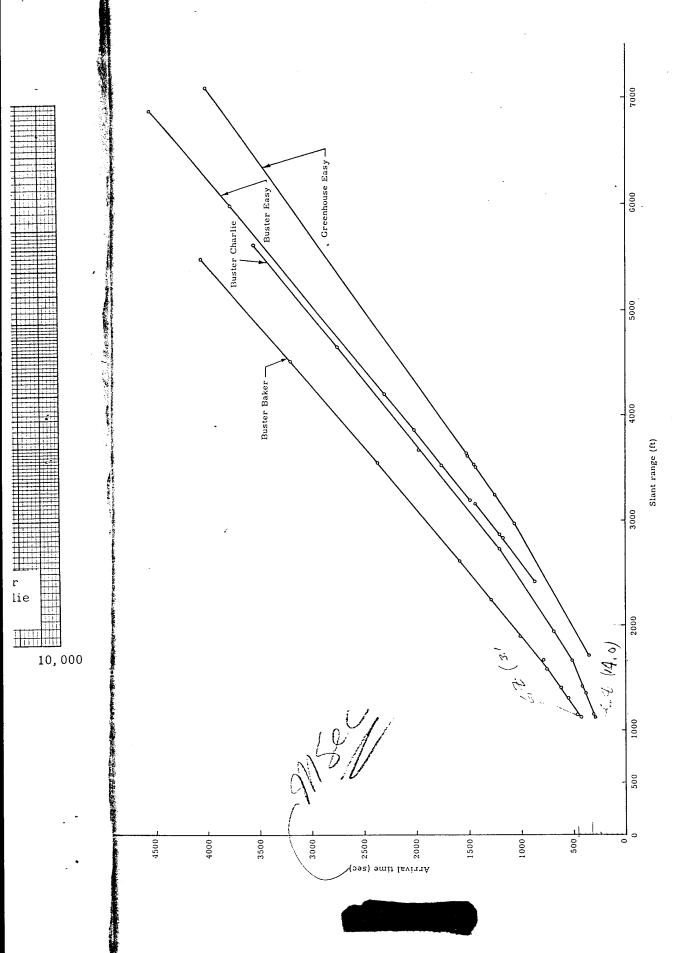


Fig. 11. -- Arrival time vs slant range

9

æ

(iaq) <sub>i</sub>q

10

11

S

2

3

0

Overpressure (psi)

1(

7

٤

3

2

1

C

14

13

12




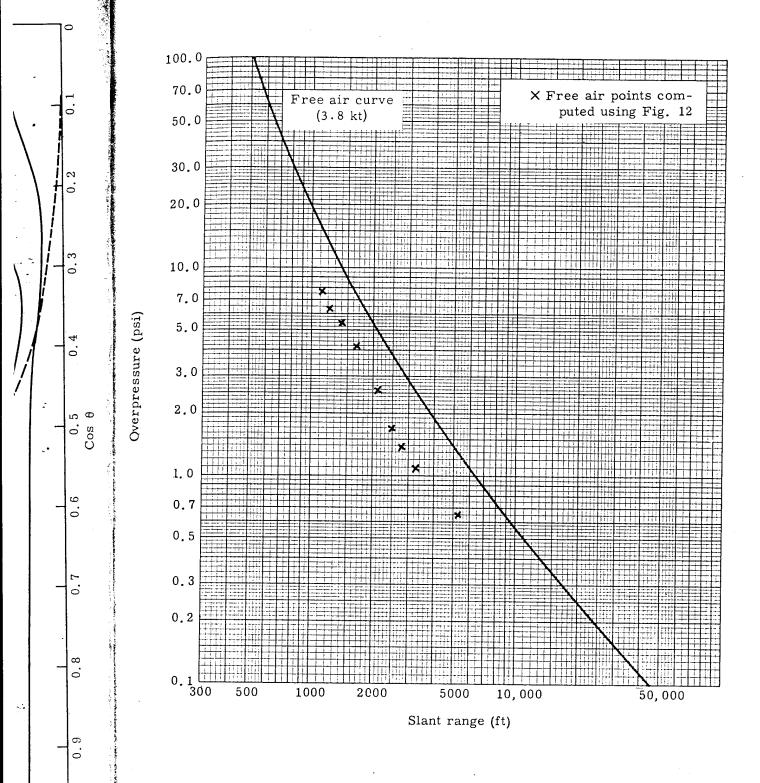


Fig. 13. -- Free air overpressure vs slant range (Buster Baker)





the free air curve, it is concluded that the reflection chart used does not strictly apply. What the same procedure is carried out for Shot Charlie, the disparity in the curves is even great

Since observed pressures were low in the region of measurement, the free air curve a derived above appears to indicate a low percentage of yield going into the blast. This may necessarily be true, however, because the slope of the curve in Fig. 6 is such that larger yields are implied at large distances than are deduced from the gauged distances.

The conclusion can be drawn that direct use of the reflection chart does not lead to a free air curve parallel to that expected. Therefore under the test conditions this particular reflection chart does not apply.

It is of interest to explore the results of the attempt to detect the growth of the Mach stem, which can be done only on Shot Baker--the only shot in which fast rise times occurred at the 15-ft altitude. Table II shows the time separation between the incident wave and the reflected wave:


TABLE II


Station	Distance from ground zero (ft)	Angle of incidence	Time separation (msec)
B315L&R	242	12	22
C15L&R	681	31.5	10
B215L	876	38	1-2
D15R	1,123	45	0

The two waves have merged at the 15-ft altitude at approximately 900 feet. From 880 to 1, 12 feet the reflected pressure is changing from 12 to 10 psi. According to the reflection chart the onset of Mach reflection in this pressure range would occur at an angle of about 50°. Act ally the onset of Mach reflection, judging from data in Table II, was at approximately 30°. Theoretically this is within the limit of regular reflection. Also the time separation of 10 msec between incident and reflected waves at C15L and C15R is not consistent with that computed from the observed reflected pressure of 13 psi, ie, 18 msec. A possible explanation of these observations is that a heated layer of air above the ground caused the shock wave to travel faster near the ground, thus increasing the angle of incidence and changing the reflection geometry.

The slow rise time observed at the ground baffle stations (compared with that at the pipe gauges) illustrates the expected effect that at ground level the shock front is altered by heating of the air near the ground prior to arrival of the shock and/or a frictional effect. The fact that the rise time is again rapid at the distant ground baffle stations is evidence that at large distances the heating of the air has a negligible effect.

An interesting feature of pressure-time data from Shot Charlie is that although the ristimes are moderately in accord with the ground baffle gauges for Shot Baker out to 300 feet, beyond this distance the shock wave has a step-like rise in pressure. Times of the order of 100 msec elapse before the peak pressure is attained. The shock wave front as observed beyond 300 feet from ground zero shows a deterioration compared with its appearance near ground zero. This deterioration, which is recorded first at stations CS and B2S, is not full overcome until the shock wave has moved out nearly a mile. The effect extends at least to the 15-ft altitude, being observed both on the ground baffle and pipe stations.





Various reasons for this effect may be conjectured, including the much-discussed possibilities of:

Heating of the air near the ground

Energy expended in raising large quantities of dust (previously loosened by Shot Baker) and in overcoming the resulting turbulence


Energy absorbed by the ground

It is suggested that the explanation of the low pressures observed on Shots Baker and Charlie can not be precisely the same, except possibly in the immediate vicinity of ground zero. The peculiar rise to peak pressure at so many stations on Shot Charlie suggests that a new effect took place in addition to what happened on Baker. One obvious difference is that the ground, relatively firm for Shot Baker, was considerably loosened by that shot prior to Shot Charlie, which was fired over the same ground zero. Another difference, of course, is that the ground received more thermal heating from Shot Charlie (heights of burst were nearly the same) and that the incident pressures were somewhat higher.

Shot Easy also provides evidence that in some way the nature of the surface affects the pressure wave as it passes. Shot Easy was fired over a macadam circle 1,500 feet in radius. Figure 8 shows that the pressures recorded on the two outermost gauges do not fall far below the expected levels, whereas the recording on the closest gauges diverge considerably. It could be inferred that because of the better surface near ground zero, the yield looks about right from a distance. In the region where the reflection chart gives large reflection coefficients, the observed pressures are low and rise times are slow. If the six gauges at Station B2, including the two mounted face up at ground level, are accurate, the pressure wave in this region of the front differed considerably from the classical shock-wave form. Unfortunately the gauge line was not designed to record shock waves from Shot Easy, each gauge being on a different radius. (This was also true to a lesser extent of the other shots, in which the gauge line was designed to record shock waves from either Station 2 or Station 3 as intended ground zeros.) Station B2 was also the closest station (2,031 feet). Thus there is no knowledge of the pressure wave in the region of regular reflection, since Mach reflection occurred prior to 1,500 feet.

So much for the characteristics of the pressure-time curves. Ignoring for the moment the nature of the curves and the causes for the observed low pressures, refer again to Figs. 6, 7, and 8. A most entertaining use of the information is to plot some of it on a height-of-burst chart. To do this the curves must be reduced to 1 kt and correction made to sea level pressure conditions. The pressure correction has the effect of increasing the pressure at a given

\*Since the observed pressures for Buster were lower than anticipated, considerable study of the data in relation to LA-743R has already been carried out by Los Alamos, Sandia, and AFSWP personnel. The Los Alamos Scientitic Laboratory is publishing a rather complete discussion of the subject in LA-1406, Height of Burst for Atomic Bombs; preliminary revision of the height-of-burst curves based on this theory was published in Supplement 1 to TM 23-200, Capabilities of Atomic Weapons, February 1952, prepared by the Armed Forces Special Weapons Project. A set of experimental height-of-burst curves has been constructed from Greenhouse, Buster, and Jangle data. Possible reasons for disparity with LA-743R are examined, and recommendations for further tests are made. The discussion parallels in part the above-mentioned memorandum, from which the experimental height-of-burst chart (Fig. 14)



distance by a small percentage. The experimental height-of-burst chart for which the reduced data were employed is shown in Fig. 14. This comparison shows that

At given distances, and especially in the high-pressure region, observed pressures are somewhat lower than the curves show.

The points representing mean effective radii at Nagasaki and Hiroshima are invariant; thus they appear in a lower pressure region if the experimental data are accepted.

There are several reasons for the discrepancy between the observed pressures and the pressures suggested by the curves:

In LA-743R, 1.5 was used as the reflection coefficient at large angles of incidence; therefore the fraction of yield going into an equivalent pentolite yield was 0.75. Using instead a reflection coefficient of 2 has the effect of reducing this fraction and dropping the pressures at given heights along the vertical axis. At 1,120 feet, for example, the 20-psi isobar intercept drops about 200 feet and is replaced at 1,120 feet by the intercept for 13 psi. At large distances, for heights of burst below the knees on the chart the pressures are slightly increased, and over the range 15 to 4 psi the changes are quite small because both calculations relate to the same experimental data (Bikini Able) in this region.


The knee on the curves arises from a strict application of the reflection chart. This chart is in part theoretical and in part based on data from shock tubes and small HE charges. Particularly in the region beyond the onset of Mach reflection, the factor by which the free air pressure is multiplied is somewhat larger than the factor for regular reflection. Also, in this region the experimental data are meager and scattered. There is some evidence, especially from Shot Baker, that these large multiplication factors are not entirely realized, or at least that the high pressures have extremely short durations. All three shots support the conclusion in that the pressures are relatively lower in this region (Figs. 6, 7, and 8) than they are farther out.

The curves at pressures greater than 20 psi have not been computed in detail. For 20 psi the knee is not pronounced. Sample calculations at higher pressures indicate that an isobar of reflected pressure on the reflection chart intersects the line of onset of Mach reflection at higher incident pressures than for normal incidence. The knee of the height-of-burst curve gradually disappears as high-pressure isobars are approached.

The reflection chart is based on a sensitive effect and represents more nearly a theoretical maximum of expectation than a compilation of experience. The theory also deals only with strict shocks. Further study is required to determine the influence of finite rise times on the phenomena of Mach reflection. There is no question but what the reflection chart is valid to some extent, but experimental verification even for HE charges is required.

Perhaps most important of all, but also most difficult to explain in detail, is the fact that the pressures attained in the shock wave are influenced by the character of the surface over which the bomb is burst. A complete study of the possible effects is time-consuming because of the large number of variables. So far as the height-of-burst curves are concerned, the variable nature of surfaces






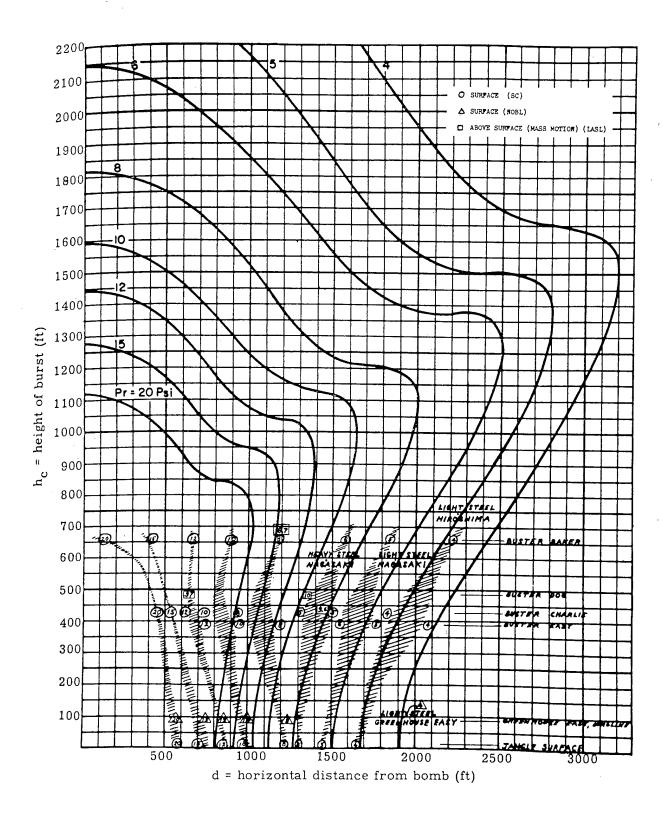


Fig. 14. -- Height-of-burst curve



distance by a small percentage. The experimental duced data were employed is shown in Fig. 14.

At given distances, and esper pressures are somewhat lower

The points represe of invariant; thus they are accepted.

There ar pressures

sly any uncertainty so a contributing

ce can affect the shock wave will le thermal or mechanical effect

e Studies

rburst bomb it is urged that every effort the pressures and mechanisms by which the measurements:

nd altitude e-time vs altitude prior to


Photogi wave, tu.

cidence and reflection of shock


The experimental study of the reflection phenomena for HE charges should be accelerated to provide a better understanding of the reflection chart and the effects of different surfaces (even in the absence of thermal radiation).

Greater emphasis should be placed on the fact that the height-of-burst curves and anticipated damage to structures subjected to a given overpressure are not known precisely. An effort should be made to present these facts to the military user in somewhat simpler terms than are used in SC-1827(Tr), which covers the subject in some detail.

Best Available Copy



Summary of Data and Pressure-Time Curves for Shots Baker, Charlie, Dog, and Easy




Summary of Blast Data -- Shot Baker

Location	Ground zero distance (ft)	Slant range (ft)	Pressure (psi) Ap	Time of arrival (msec)	Positive duration (msec)
A2S	1,243	1,670	6.5	791	330-400
A3S	117	1,121	16	433	Not reliable
B2S	859	1,405	11	620	350
B215L	876	1,405	12 112.5	633.5	370
B215R	876	1,405	11 2.5	633	375
B3S	259	1,145	19	446	280
B315L	242	1,145	18 10	459	250
B315R	242	1,145	15 3	459	330
CS	681	1,308	12 .	553.5	290
C15L	681	1,308	13 -	561	300-400
C15R	681	1,308	13.5 4	561	300
DS	1,123	1,585	9	757	380
D15L	1,123	1,585	15	764	5-msec spike
D15L	1,123	1,585	9	_	380
D15R	1,123	1,585	20	765	5-msec spike
D15R	1,123	1,585	11	_	400
E15L	1,543	1,905	11.5	1,015	10-msec spike
E15L	1,543	1,905	9	· <u>-</u>	300
E15R	1,543	1,905	12	1,016	8-msec spike
E15R	1,543	1,905	10	=	360
FS	1,953	2,250	7.8	1,288	400
F15R	1,953	2,250	8.00	1,297	5-msec spike
F15R	1,953	2,250	6.8	_	300
GS	2,361	2,615	5.80	1,588	430
HS	3,375	3,555	3.3	2,379	520
IS	4,380	4,520	2.7	3,209	580
JS	5,385	5,510	1.9	4,059	640

From aiming point:

N 141 feet W 0 feet H 1,118 feet




Summary of Blast Data -- Shot Charlie

Location	Ground zero distance (ft)	Slant range (ft)	Pressure (psi)	Time of arrival (msec)	Positive duration (msec)
A2S A3S B2S B215L B215R B3S B315L CS C15L C15R DS D15L D15R ES E15L E15R FS F15R GS HS IS	1,246 163 877 894 894 298 281 768 768 768 1,245 1,245 1,245 1,673 1,673 2,138 2,138 2,138 2,495 3,505 4,520 5,520	1,668 1,122 1,415 1,415 1,415 1,152 1,152 1,352 1,352 1,352 1,668 1,668 1,668 1,945 1,945 1,945 2,410 2,735 3,675 4,660 5,630	13 65 26.5 26.8 24.6 62 60 30.5 28.5 30 16.4 12±1 18±2 8.5 8±1 11 6.5 - 7±1 6 7.20 4.8 4.0 2.9	520 298.4 418 469 469.5 307 320.1 386 418 417 516 524 524 690±3 698 698 - 920 1,202±3 1,977 2,754 3,557	600 - 385 400 500 - 340 415 470 405 630 580 700 600 600 - 590 660 710 736 883
JS	5,520	2,05-			

From aiming point:

N 135 feet W 135 feet H 1,111 feet






Summary of Blast Data -- Shot Easy

	Ground zero distance	Slant range	Pressure	Time of	Positive
Location	(ft)	(ft)	(psi)	arrival (msec)	duration
			<u> (ps1)</u>	(msec)	(msec)
A2S	1,732	2,174	No Signal	_	_
A3S	2,873	3,159	6.8	1,439	780
B2S	2,031	2,420	8.5	870	770
B2P0	2,031	2,420	11	871	740
B2P5	2,031	2,420	10	871	740
B2P10	2,031	2,420	11	873	780
B2P25	2,031	2,420	10	879	780
B2P50	2,031	2,420	9	888	800
B3S	2,541	2,862	7.6	1,210	900
CS	2,505	2,832	7.3	1,180	700
C15L	2,505	2,832	7.0	1,187	750
C15R	2,505	2,832	7.4	1,183	840
DS	2,910	3,195	7.6	1,490	790
DPO	2,910	3,195	8.5	1,493	800
DP5	2,910	3,195	8.5	-	820
DP10	2,910	3,195	8.7	=	860
DP25	2,910	3,195	9	1,500	1,000
DP50	2,910	3,195	9	1,503.7-	850
			i .	1,515.6	
ES	3,270	3,527	7	1,761	840
E15L	3,270	3,527	7	1,764	850
E15R	3,270	3,527	8	1,765	880
FS	3,630	3,862	5	2,025.5	900
F15R	3,630	3,862	7	2,030	750
GS	3,995	4,210	6.60	2,301.6	1,300
HS	4,915	5,085	No Signal	-	-
IS.	5,860	6,000	4.7	3,776	1,300
JS	6,750	6,950	3.4	4,569	1,250


From aiming point:

S 54 feet W 192 feet H 1,314 feet





Pressure-Time Data Shot Baker



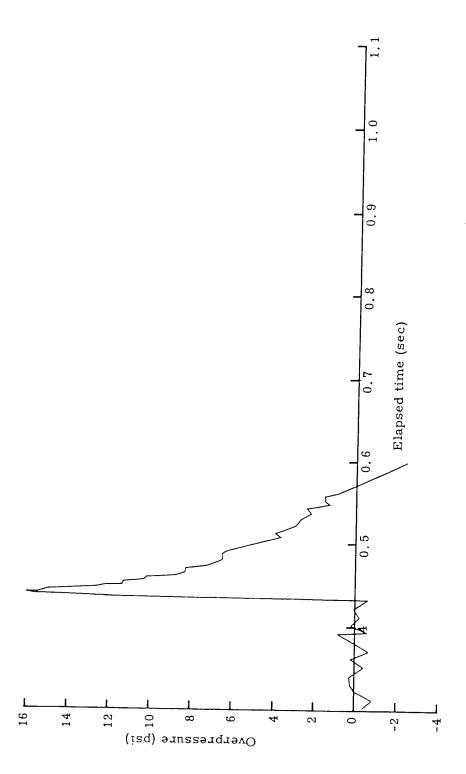



Fig. 15. -- Shot Baker (A3S) (ground baffle) (distance from ground zero: 117 ft)



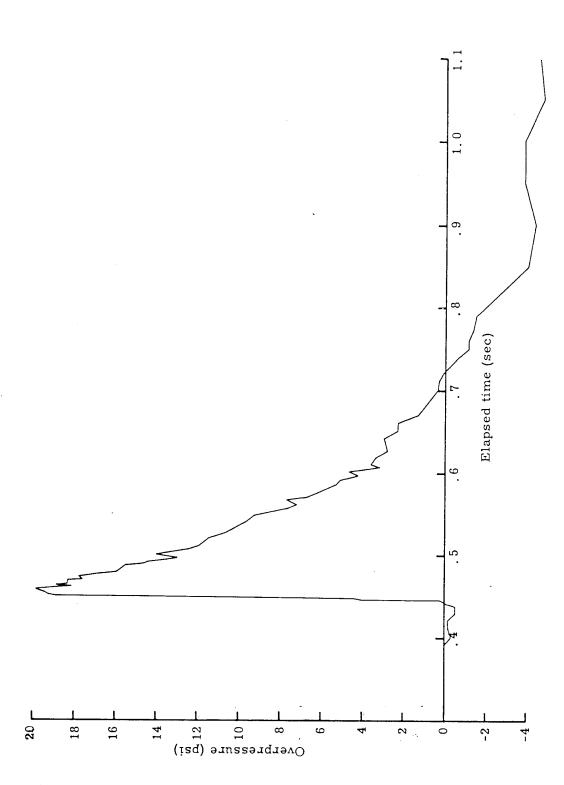


Fig. 16. -- Shot Baker (B3S) (ground baffle) (distance from ground zero: 259 ft)

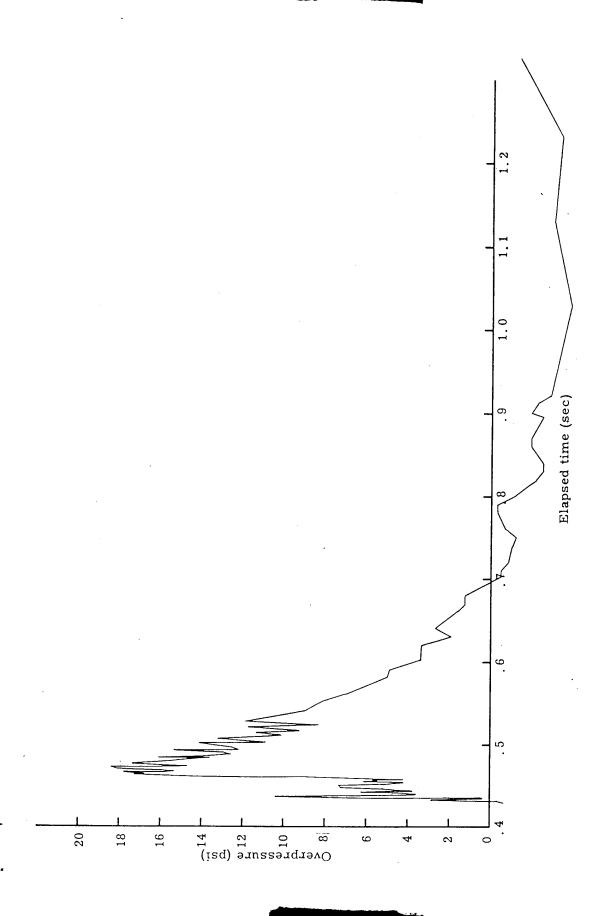



Fig. 17. -- Shot Baker (B315L) (gauge 15 ft above ground) (distance from ground zero: 242 ft)



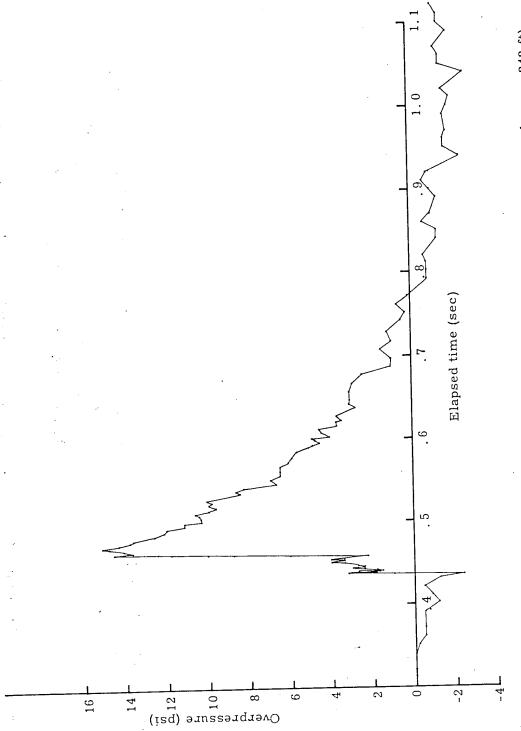



Fig. 18. -- Shot Baker (B315R) (gauge 15 ft above ground) (distance from ground zero: 242 ft)



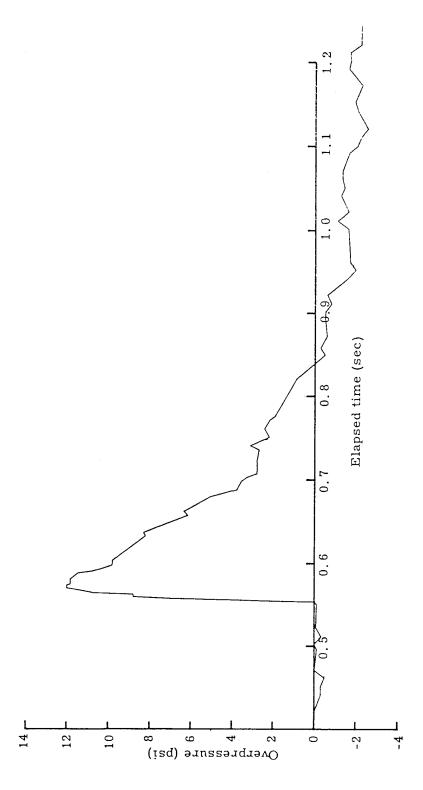



Fig. 19. -- Shot Baker (CS) (ground baffle) (distance from ground zero: 681 it)



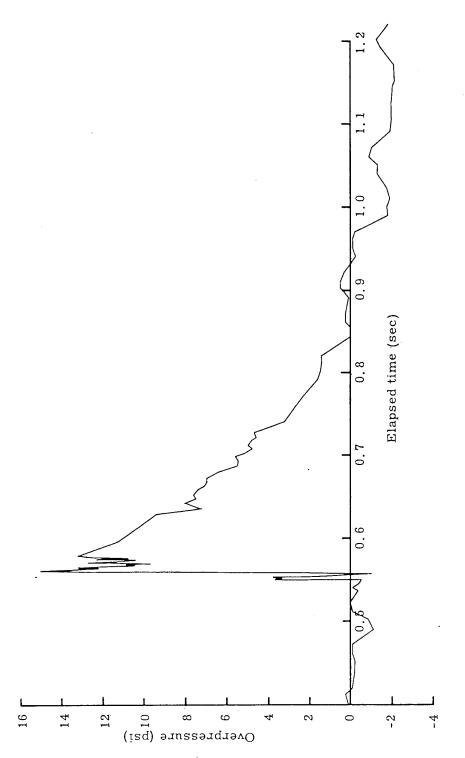


Fig. 20. -- Shot Baker (C15R) (gauge 15 ft above ground) (distance from ground zero: 681 ft)

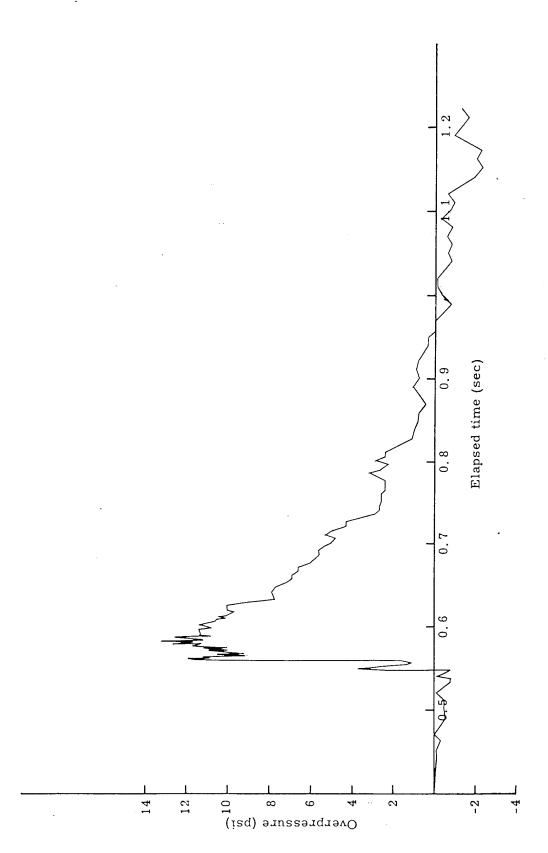



Fig. 21. -- Shot Baker (C15L) (gauge 15 ft above ground) (distance from ground zero: 681 ft)



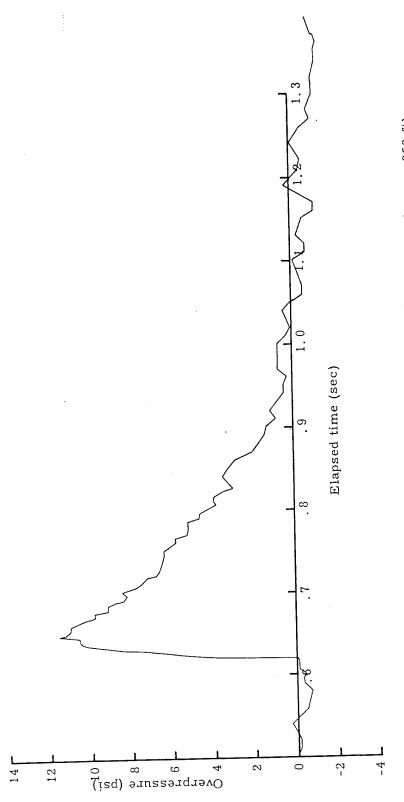



Fig. 22. -- Shot Baker (B2S) (ground baffle) (distance from ground zero: 859 ft)



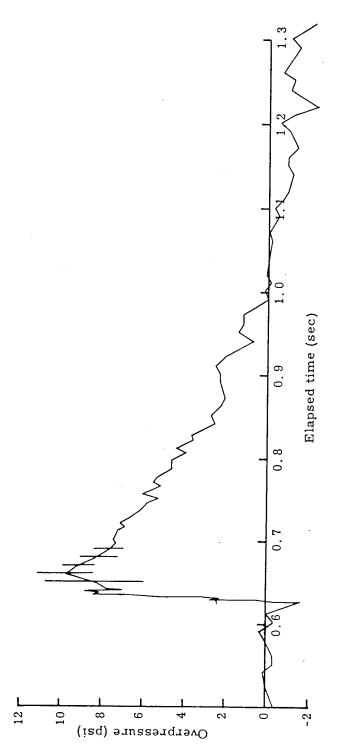


Fig. 23. -- Shot Baker (B215R) (gauge 15 ft above ground) (distance from ground zero: 876 ft)



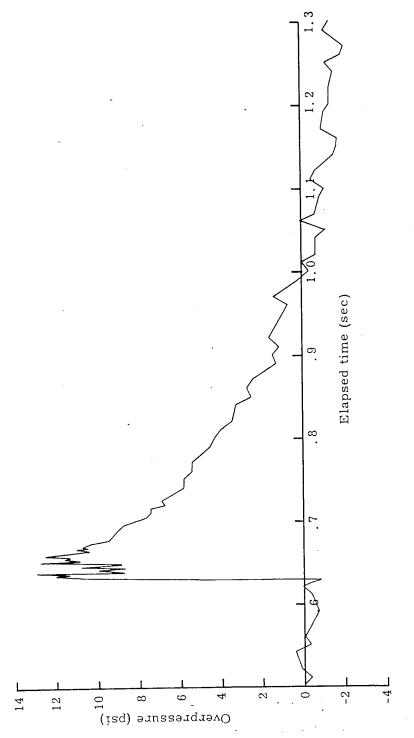



Fig. 24. -- Shot Baker (B215L) (gauge 15 ft above ground) (distance from ground zero: 870 ft)



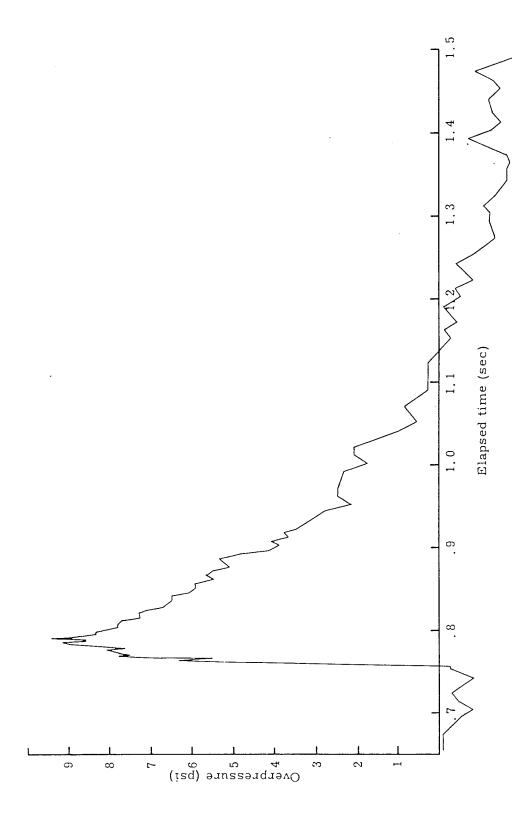



Fig. 25. -- Shot Baker (DS) (ground baffle) (distance from ground zero: 1,123 ft)



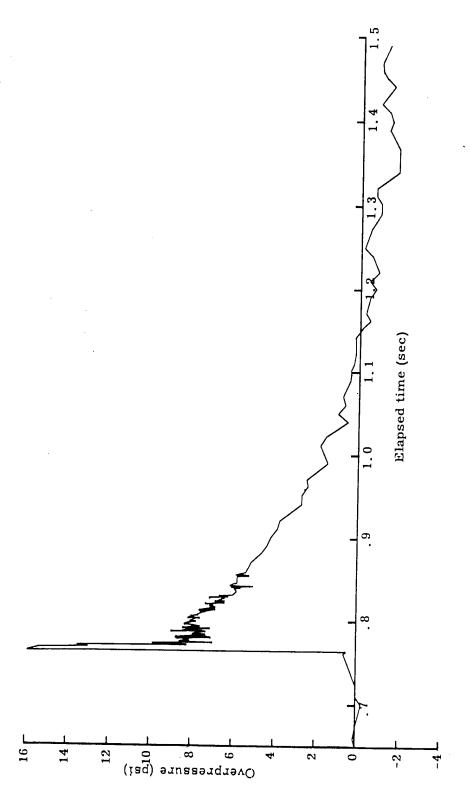



Fig. 26. -- Shot Baker (D15L) (gauge 15 ft above ground) (distance from ground zero: 1,123 ft)



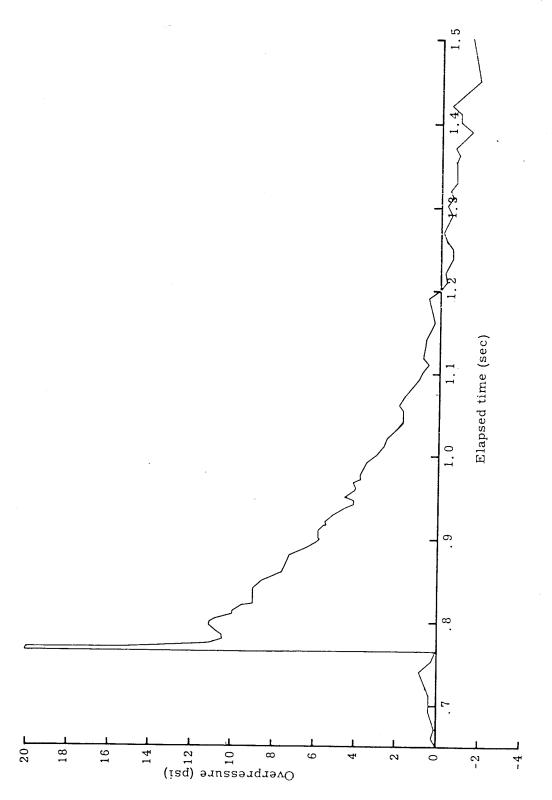


Fig. 27. -- Shot Baker (D15R) (gauge 15 ft above ground) (distance from ground zero: 1,123 ft)



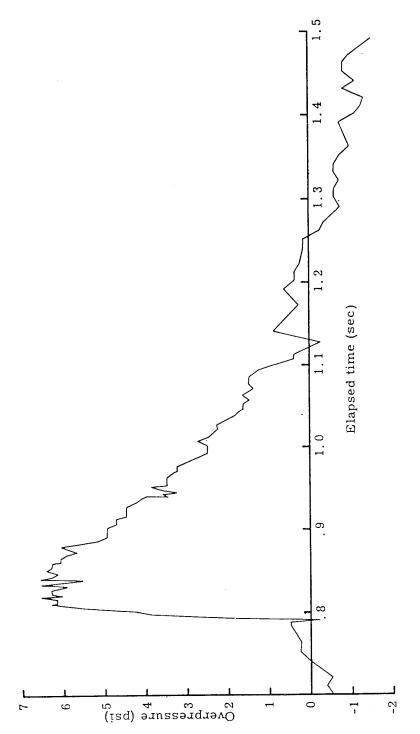



Fig. 28. -- Shot Baker (A2S) (ground baffle) (distance from ground zero: 1,243 ft)



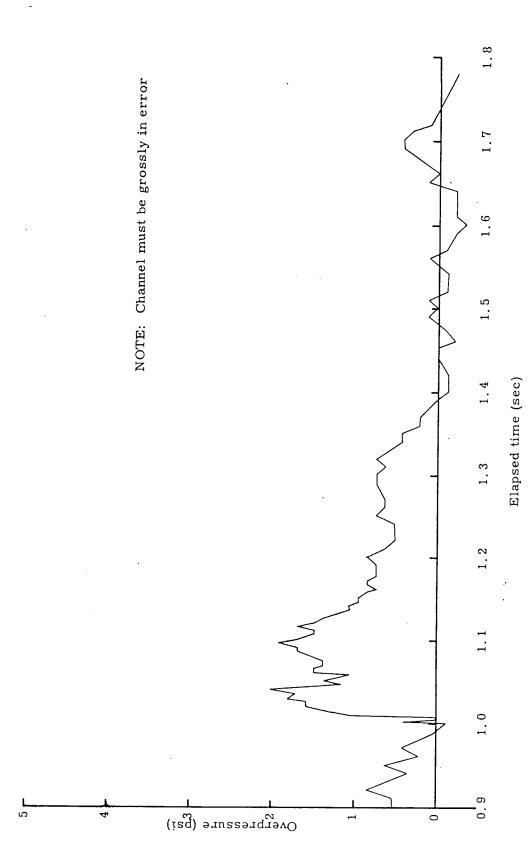



Fig. 29. -- Shot Baker (ES) (ground baffle) (distance from ground zero: 1,543 ft)



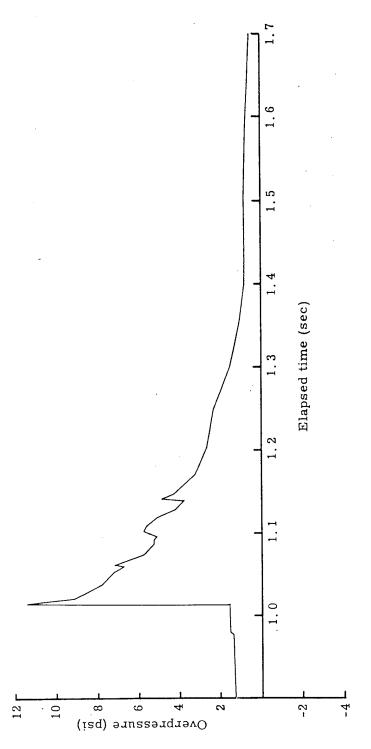



Fig. 30. -- Shot Baker (E15L) (gauge 15 ft above ground) (distance from ground zero: 1,543 ft)



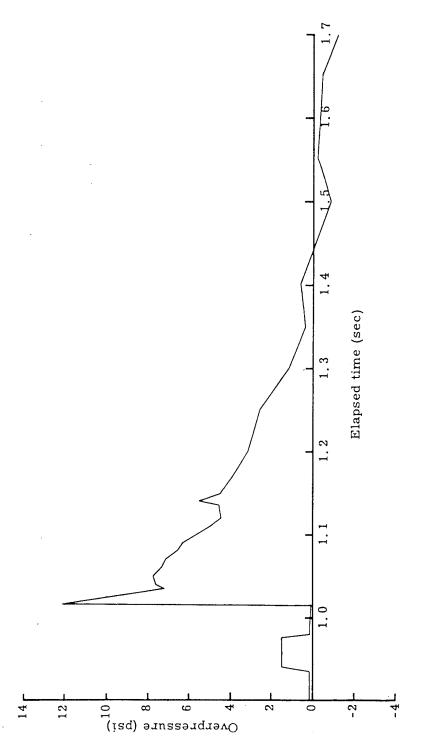



Fig. 31. -- Shot Baker (E15R) (gauge 15 ft above ground) (distance from ground zero: 1,543 ft)



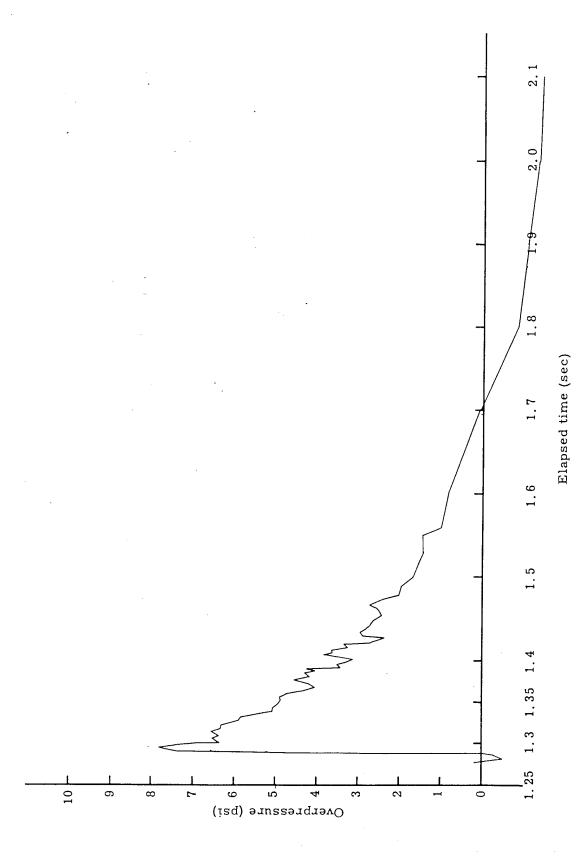



Fig. 32. -- Shot Baker (FS) (ground baffle) (distance from ground zero: 1,953 ft)



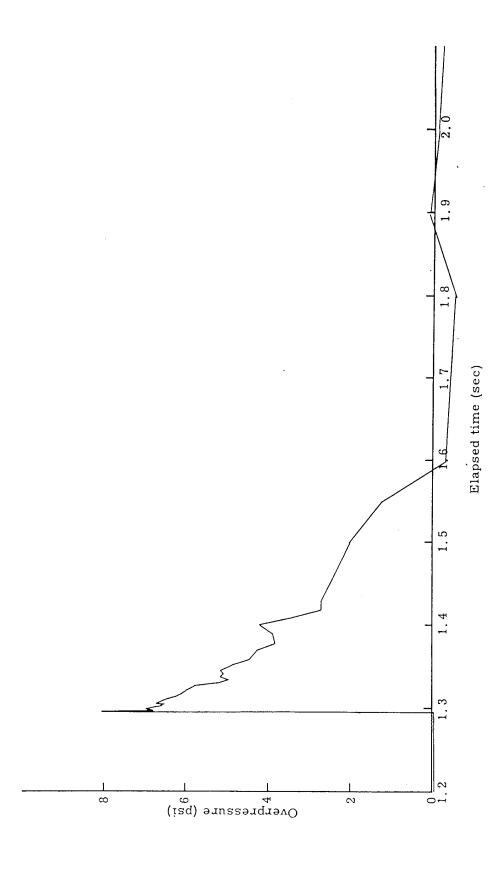


Fig. 33. -- Shot Baker (F15R) (gauge 15 ft above ground) (distance from ground zero: 1,953 ft)



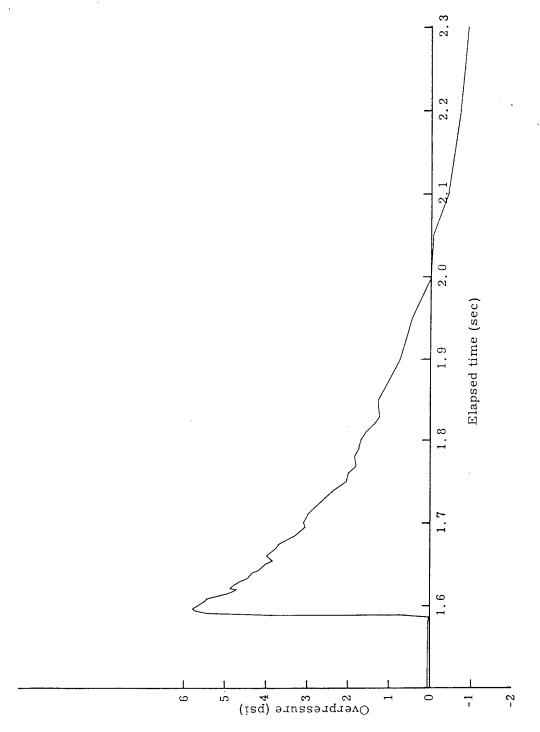



Fig. 34. -- Shot Baker (GS) (ground baffle) (distance from ground zero: 2,361 ft)





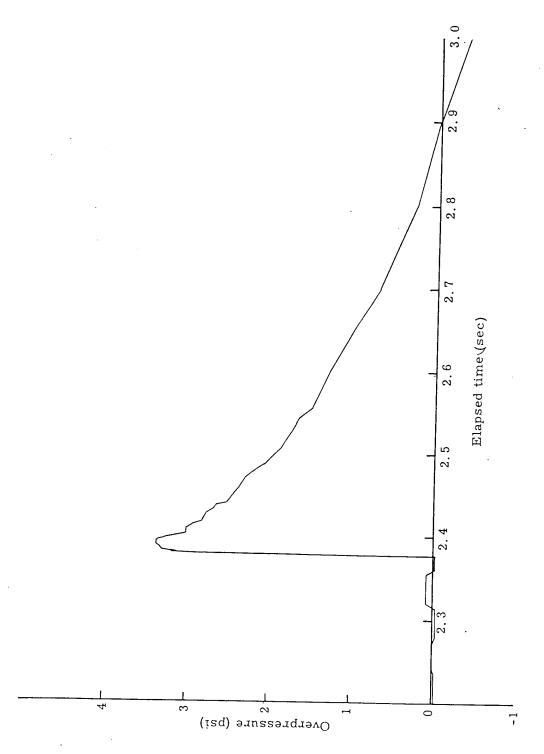



Fig. 35. -- Shot Baker (HS) (ground baffle) (distance from ground zero: 3,375 ft)



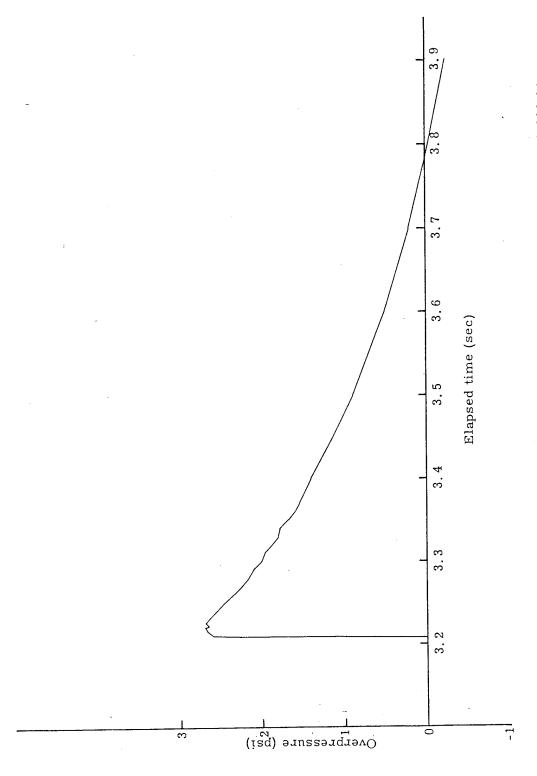



Fig. 36. -- Shot Baker (IS) (ground baffle) (distance from ground zero: 4,380 ft)





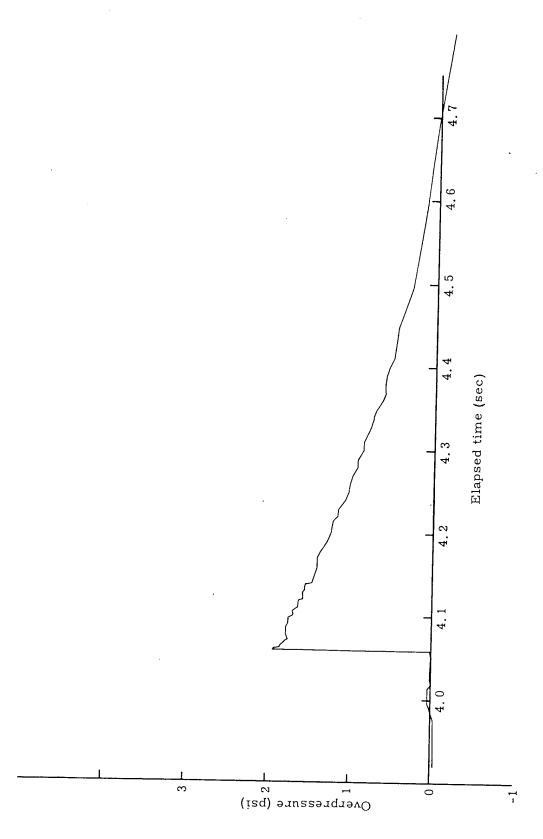



Fig. 37. -- Shot Baker (JS) (ground baffle) (distance from ground zero: 5,385 ft)



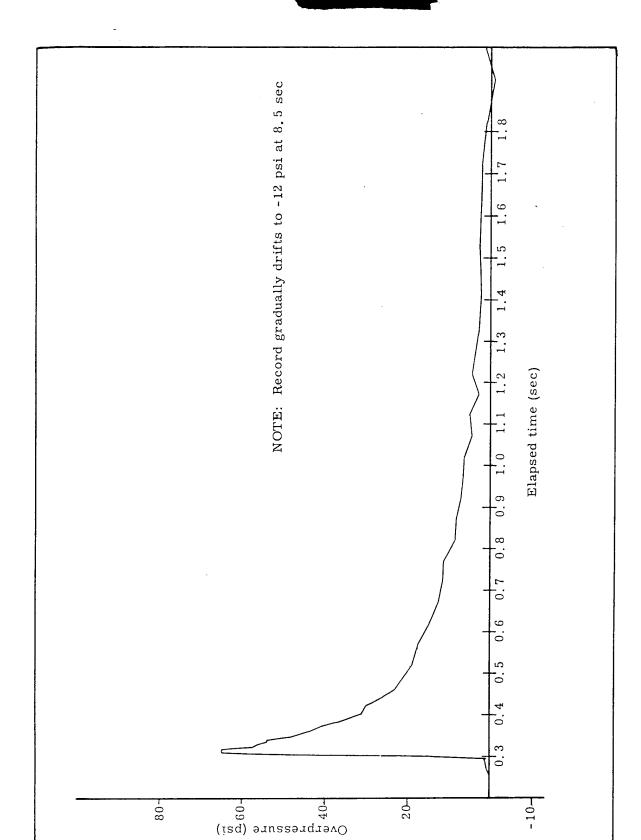



Fig. 38. -- Shot Charlie (A3S) (ground baffle) (distance from ground zero: 163 ft)



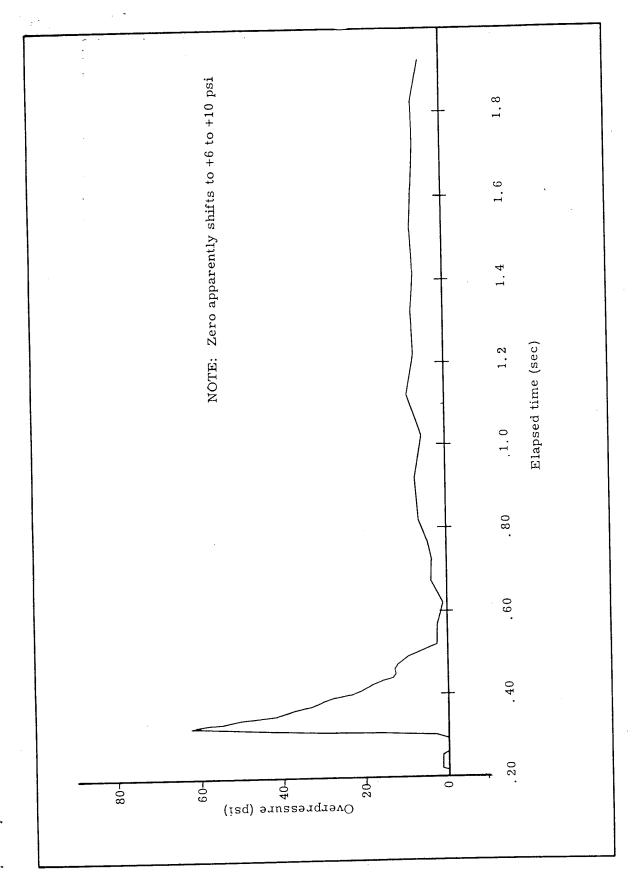



Fig. 39. -- Shot Charlie (B3S) (ground baffle) (distance from ground zero: 298 ft)





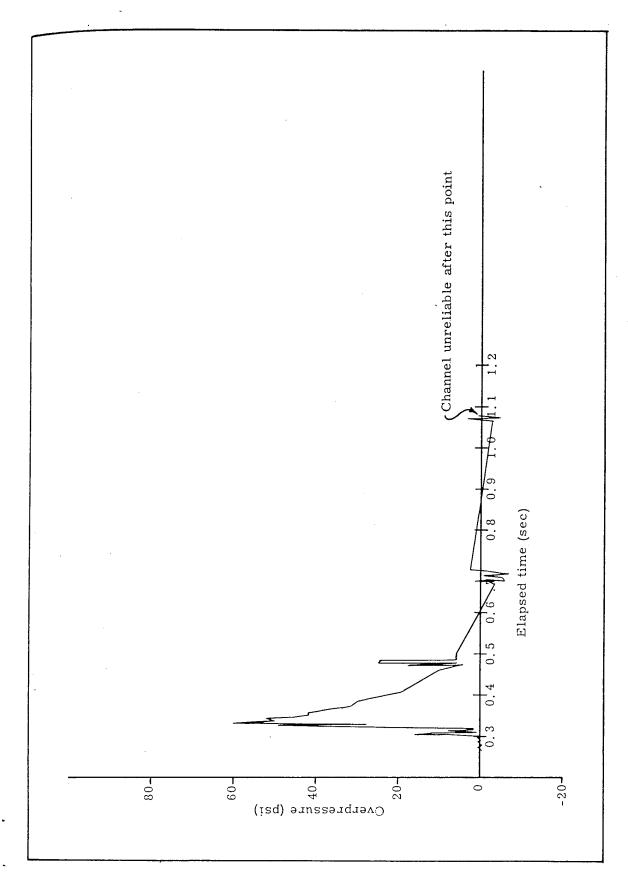


Fig. 40. -- Shot Charlie (B315L) (gauge 15 ft above ground) (distance from ground zero: 281 ft)



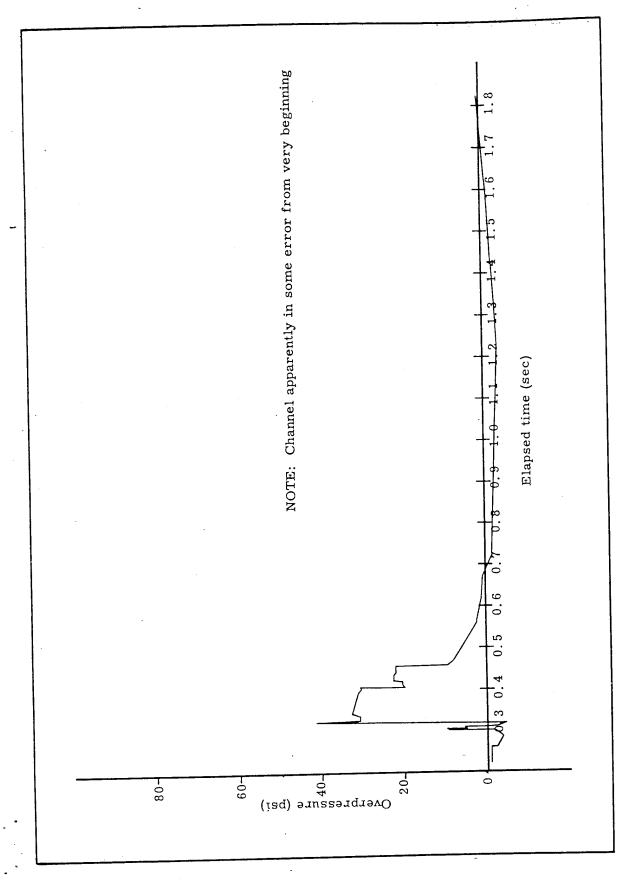


Fig. 41. -- Shot Charlie (B315R) (gauge 15 ft above ground) (distance from ground zero: 281 ft)



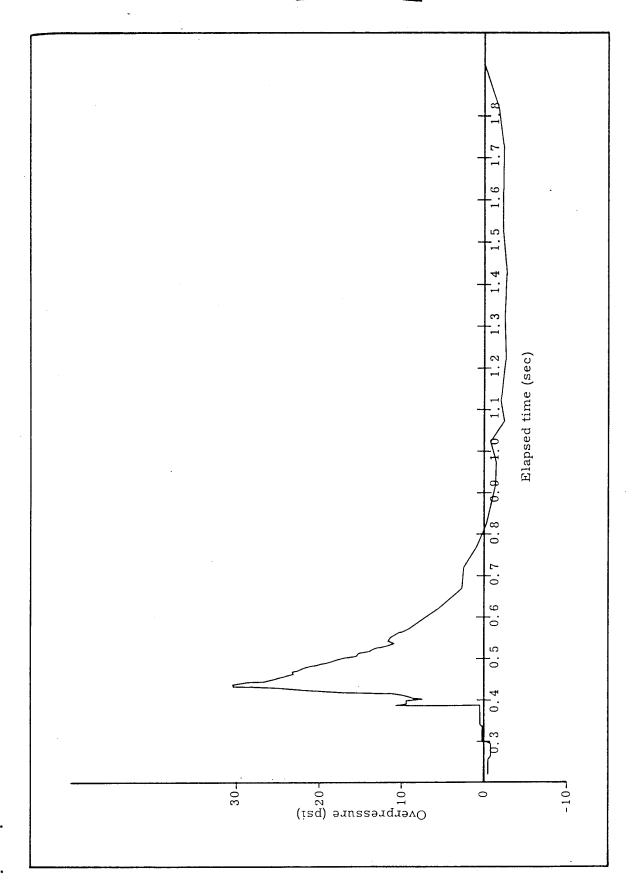


Fig. 42. -- Shot Charlie (CS) (ground baffle) (distance from ground zero: 768 ft)






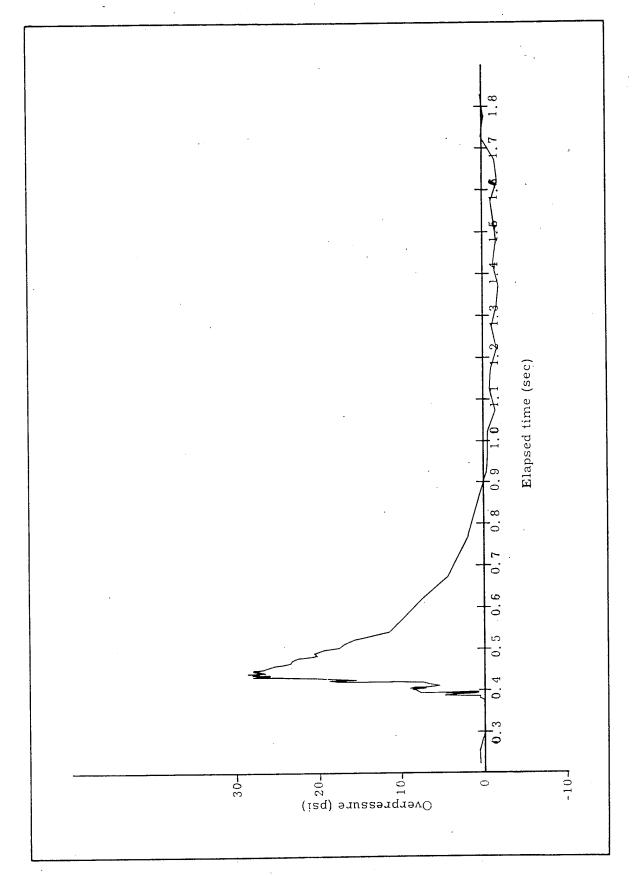


Fig. 43. -- Shot Charlie (C15L) (gauge 15 ft above ground) (distance from ground zero: 768 ft)



The state of the s

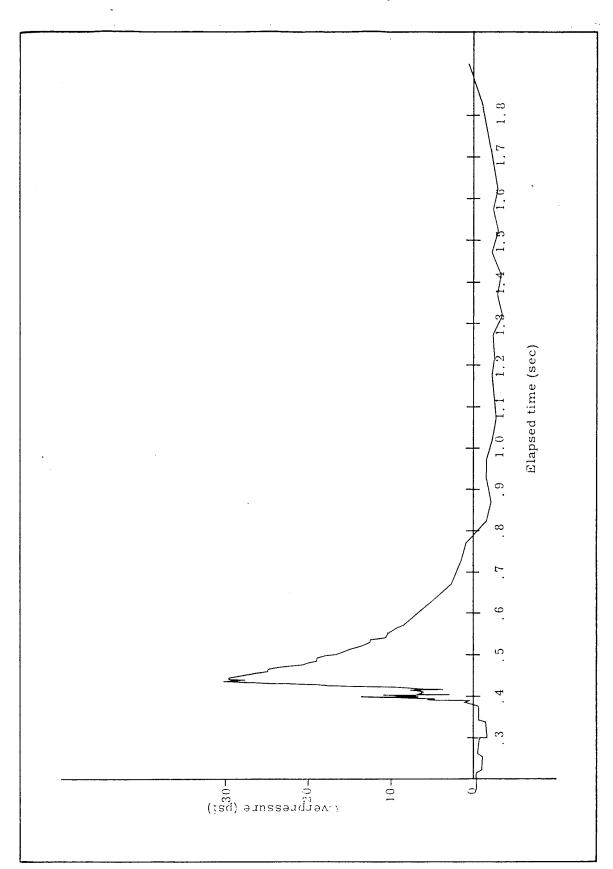


Fig. 44. -- Shot Charlie (C15R) (gauge 15 ft above ground) (distance from ground zero: 768 ft)



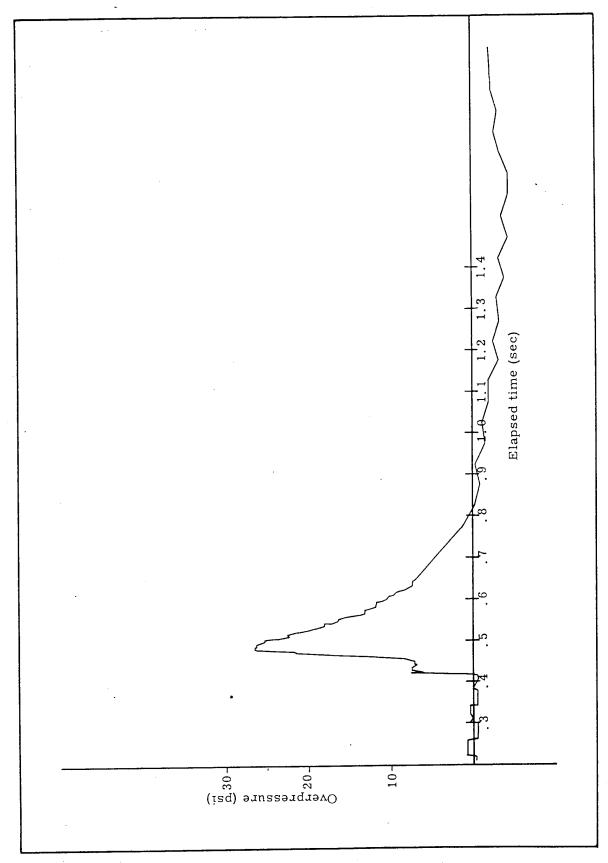



Fig. 45. -- Shot Charlie (B2S) (gauge 15 ft above ground) (distance from ground zero: 877 ft)





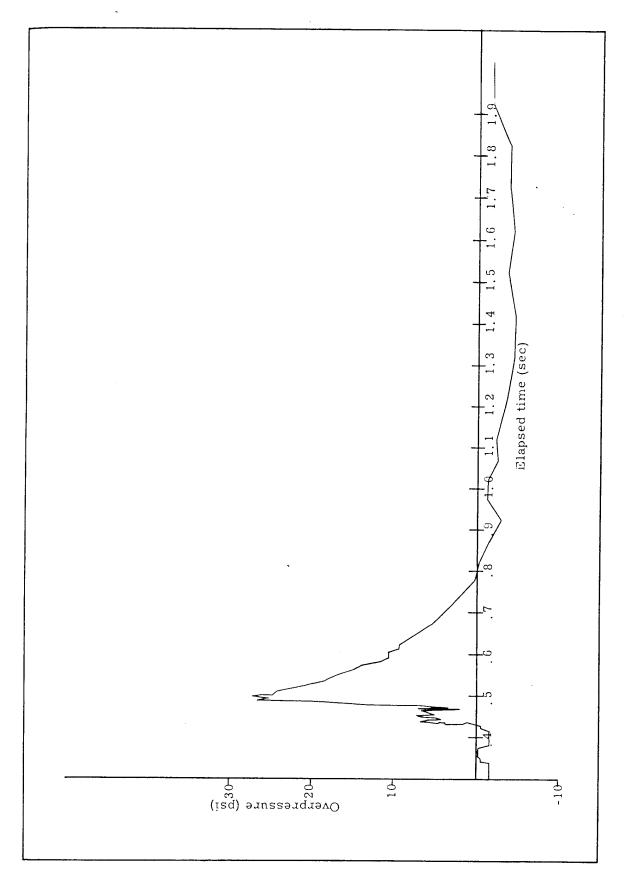


Fig. 46. -- Shot Charlie (B215L) (gauge 15 ft above ground) (distance from ground zero: 894 ft)




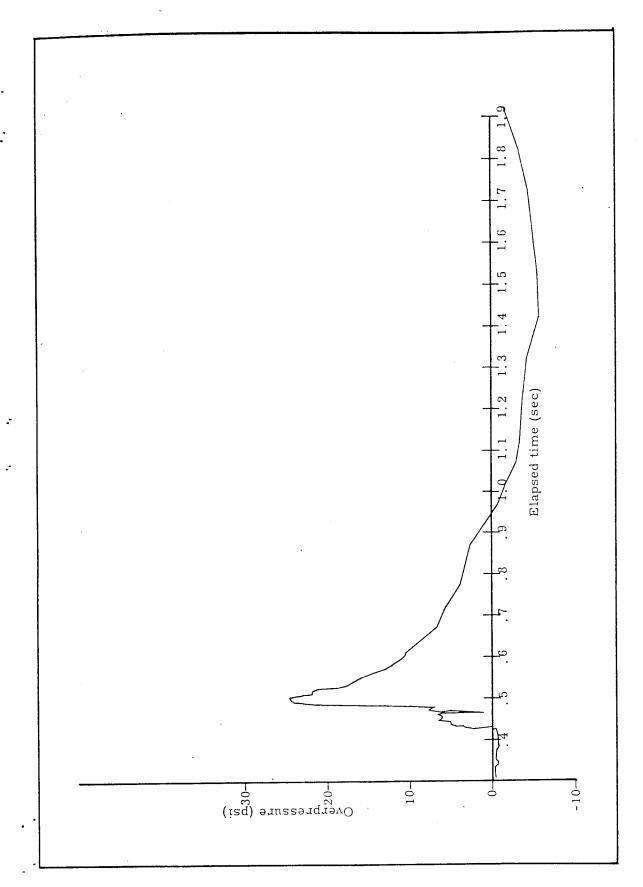


Fig. 47. -- Shot Charlie (B215R) (gauge 15 ft above ground) (distance from ground zero: 894 ft)

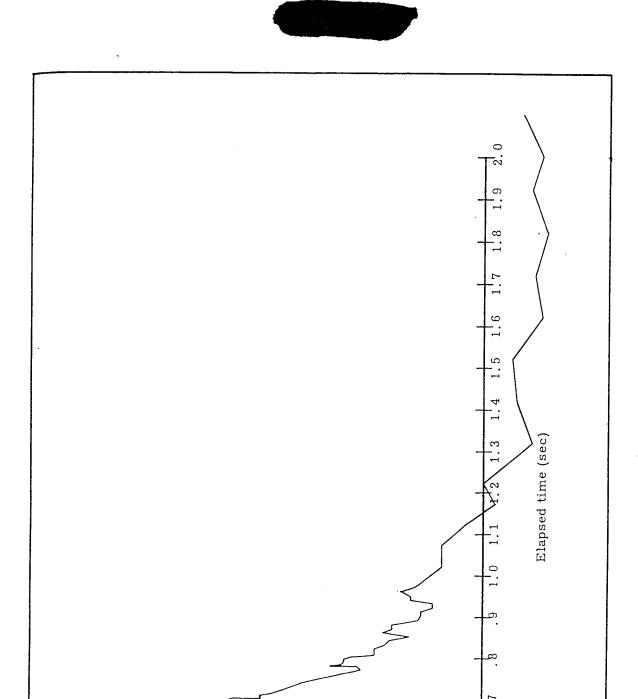

Overpressure (psi)

9

4

2

-2-

14-

Fig. 48. -- Shot Charlie (A2S) (ground baffle) (distance from ground zero: 1,246 ft)



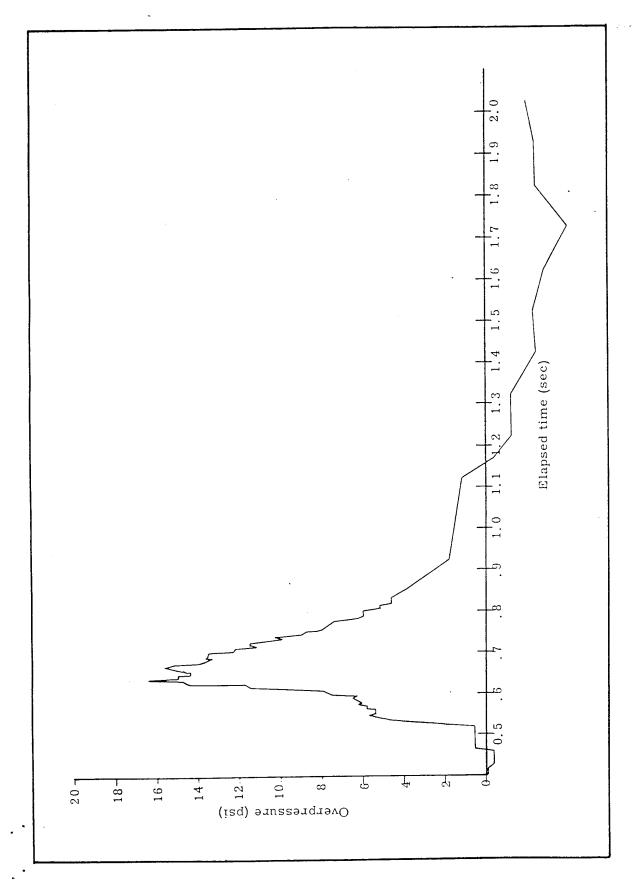


Fig. 49. -- Shot Charlie (DS) (ground baffle) (distance from ground zero: 1,245 ft)



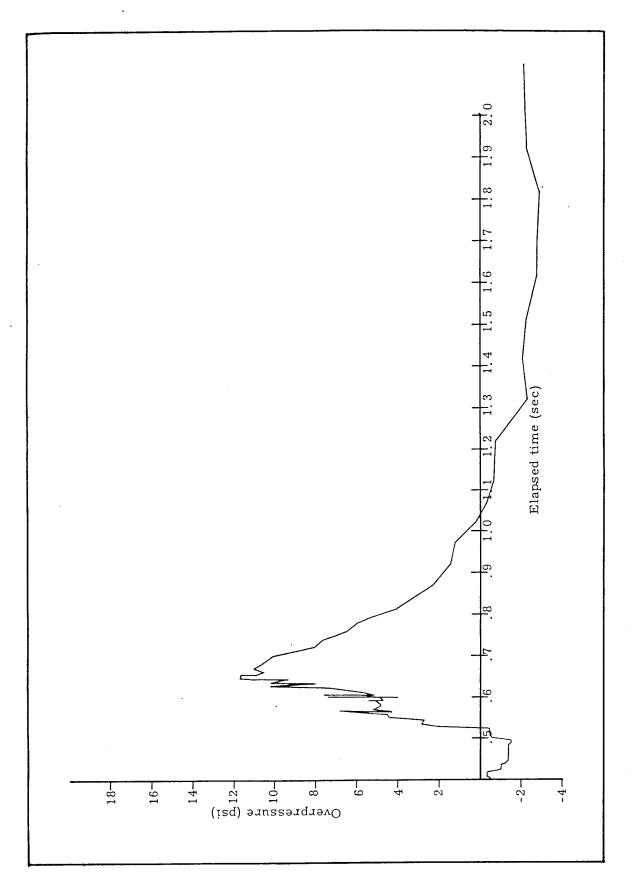


Fig. 50. -- Shot Charlie (D15L) (gauge 15 ft above ground) (distance from ground zero: 1,245 ft)





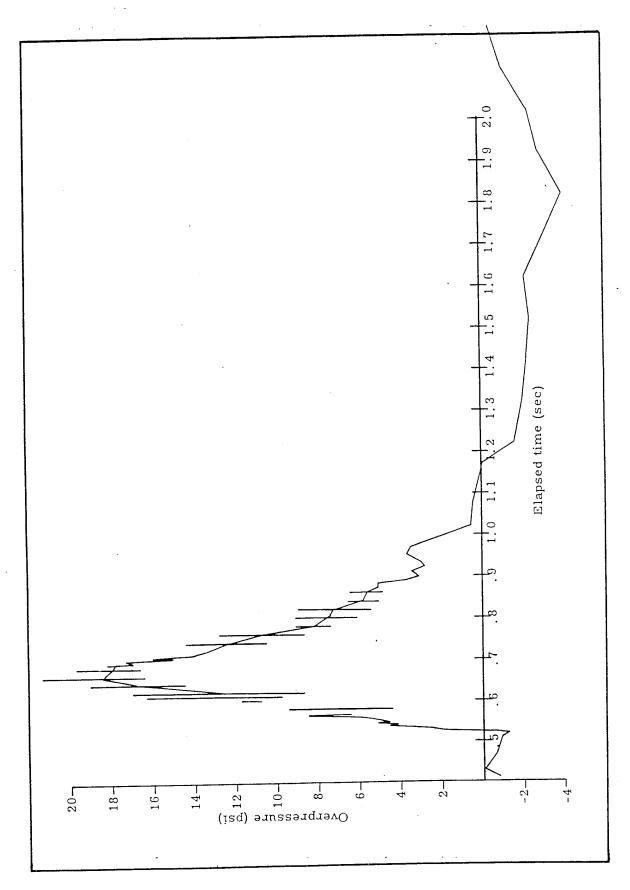


Fig. 51. -- Shot Charlie (D15R) (gauge 15 ft above ground) (distance from ground zero: 1,245 ft)





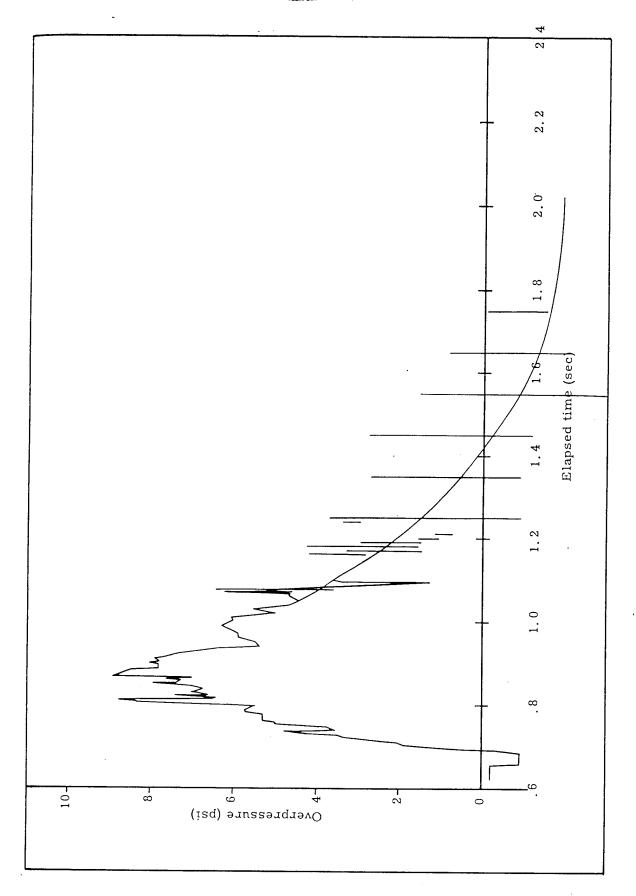



Fig. 52. -- Shot Charlie (ES) (ground baffle) (distance from ground zero: 1,673 ft)





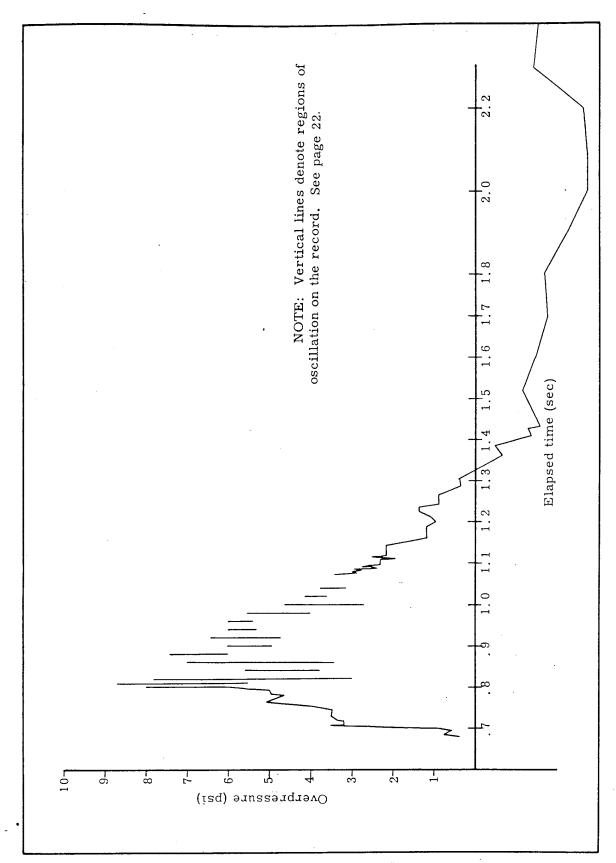


Fig. 53. -- Shot Charlie (E15L) (gauge 15 ft above ground) (distance from ground zero: 1,673 ft)

できる はいないないとう



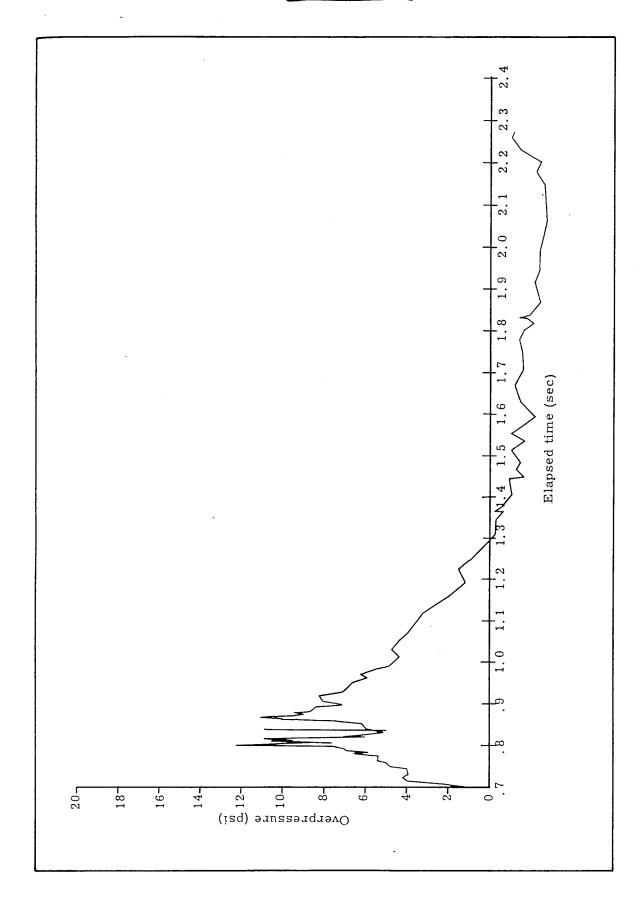



Fig. 54. -- Shot Charlie (E15R) (gauge 15 ft above ground) (distance from ground zero: 1,673 ft)





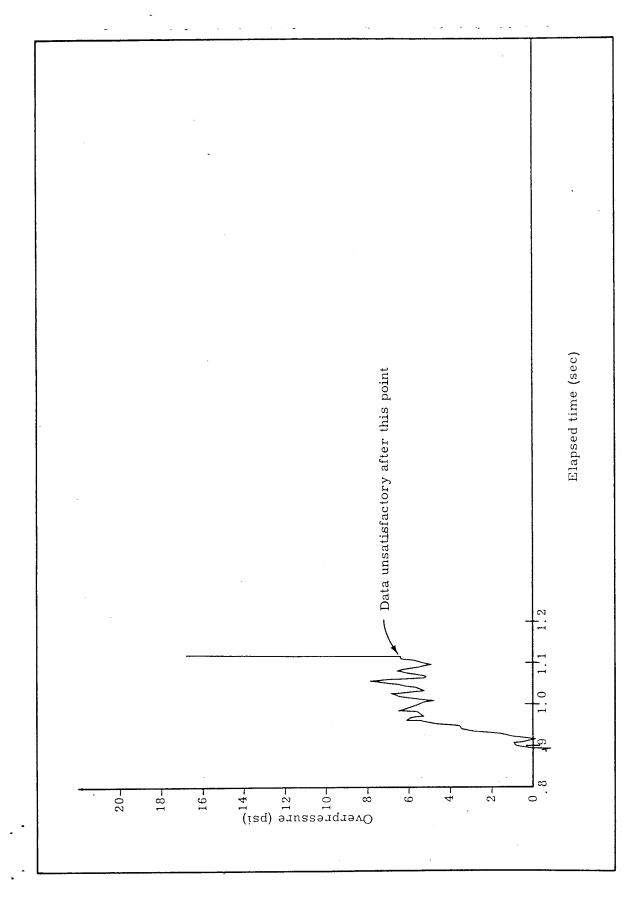



Fig. 55. -- Shot Charlie (FS) (ground baffle) (distance from ground zero: 2, 138 ft)



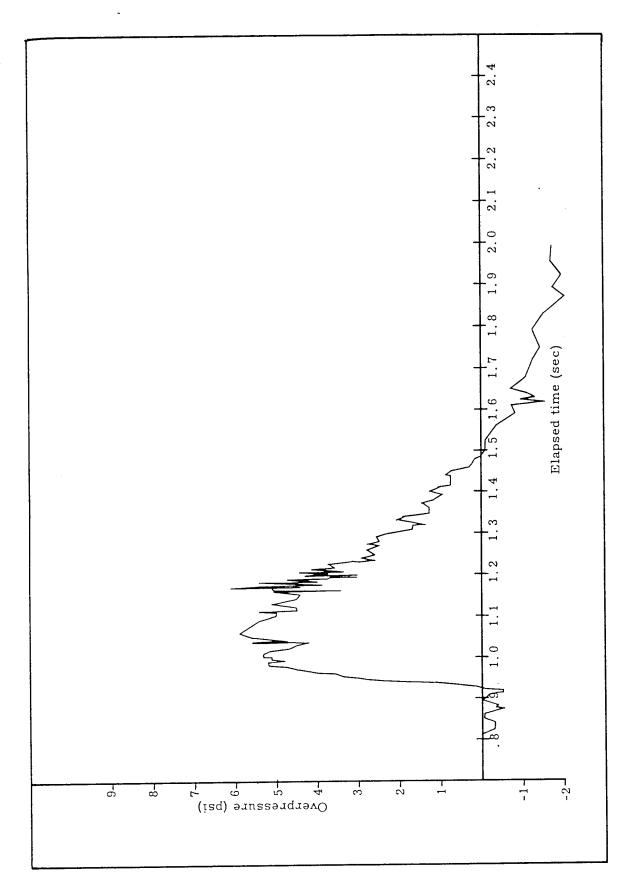



Fig. 56. -- Shot Charlie (F15R) (gauge 15 ft above ground) (distance from ground zero: 2,138 ft)





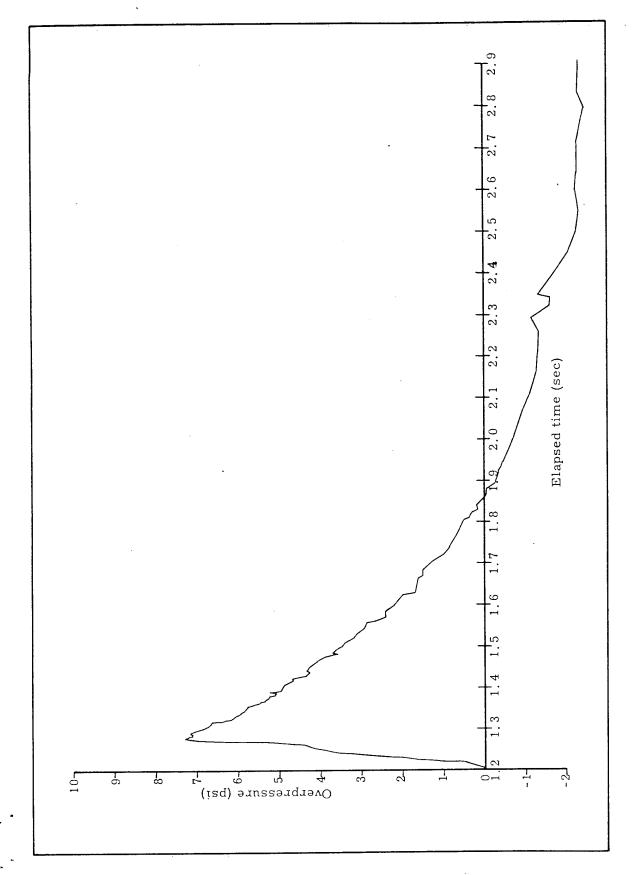



Fig. 57. -- Shot Charlie (GS) (ground baffle) (distance from ground zero: 2,495 ft)



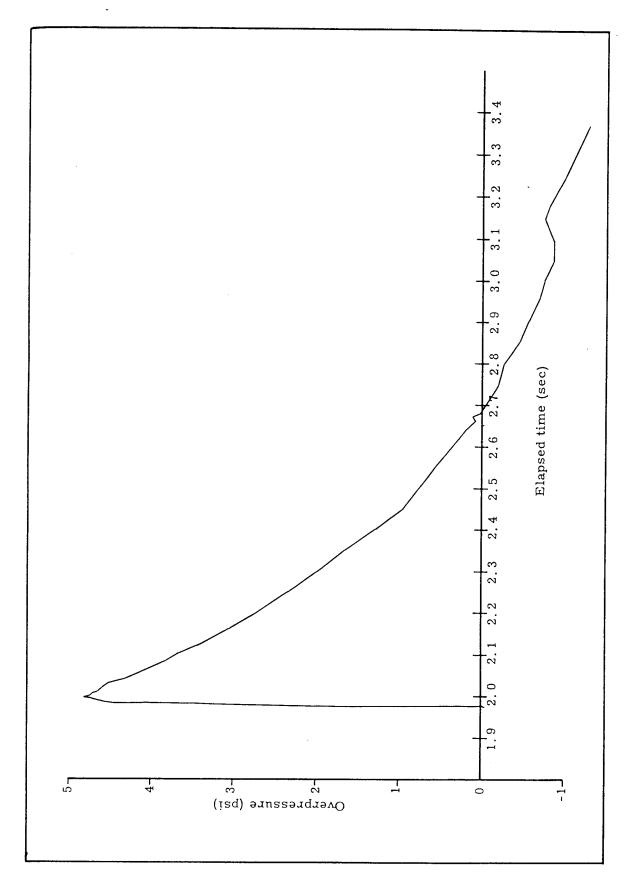



Fig. 58. -- Shot Charlie (HS) (ground baffle) (distance from ground zero: 3,505 ft)



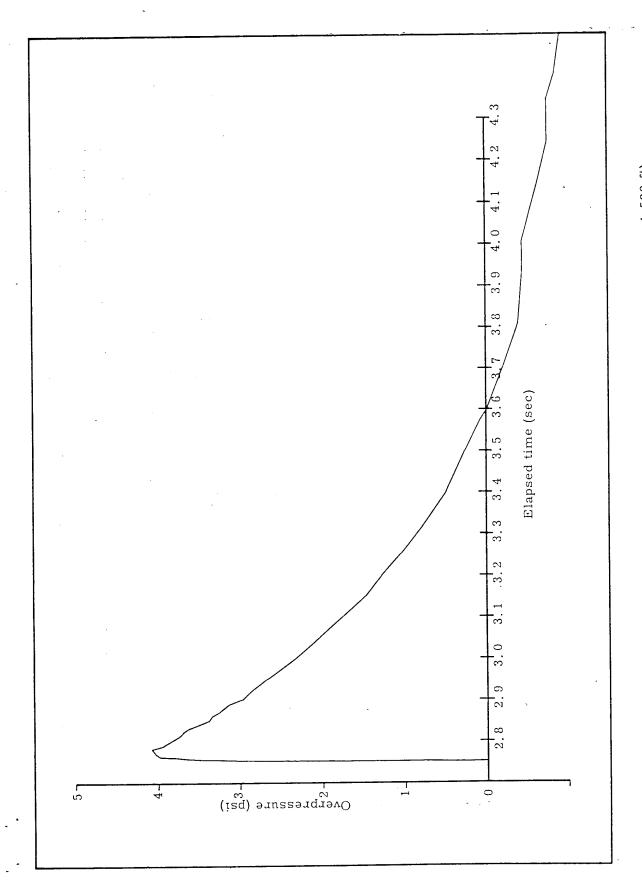


Fig. 59. -- Shot Charlie (IS) (ground baffle) (distance from ground zero: 4,520 ft)

· 以外の一人をは一人のはないないないである。 ちゅうしんしん ないない

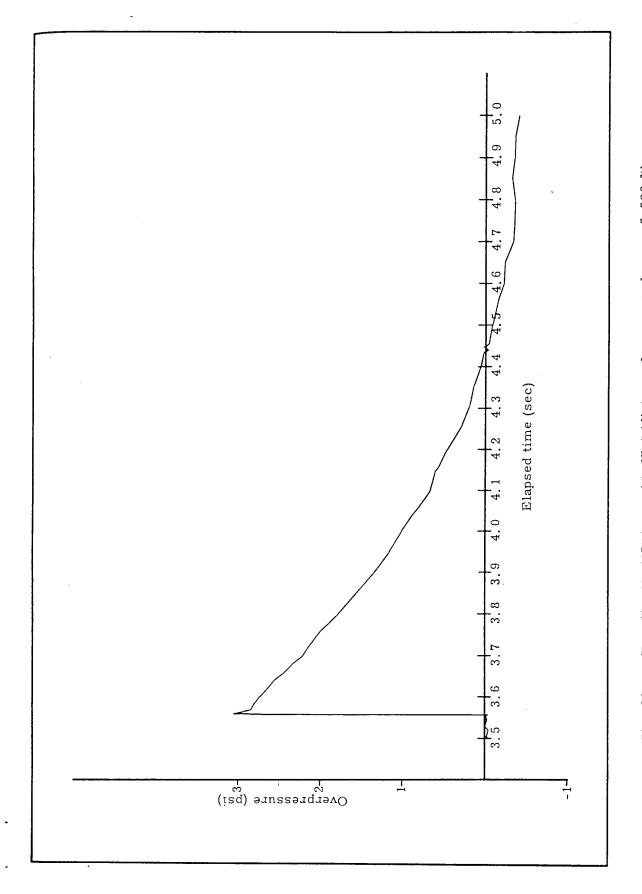


Fig. 60. -- Shot Charlie (JS) (ground baffle) (distance from ground zero: 5,520 ft)

Pressure-Time Data Shot Dog


アンプライン アーマーテー はも しょうを変し 機能ない 変し

Note: Zero time arbitrarily chosen because of late arrival of signal starting recording 0.8 9.0 0.2 5-7 4-1 I Overpressure (psi)

Fig. 61. -- Shot Dog (JS) (ground baffle) (distance from ground zero: 5,400 ft)

Time (sec)

Pressure-Time Data Shot Easy



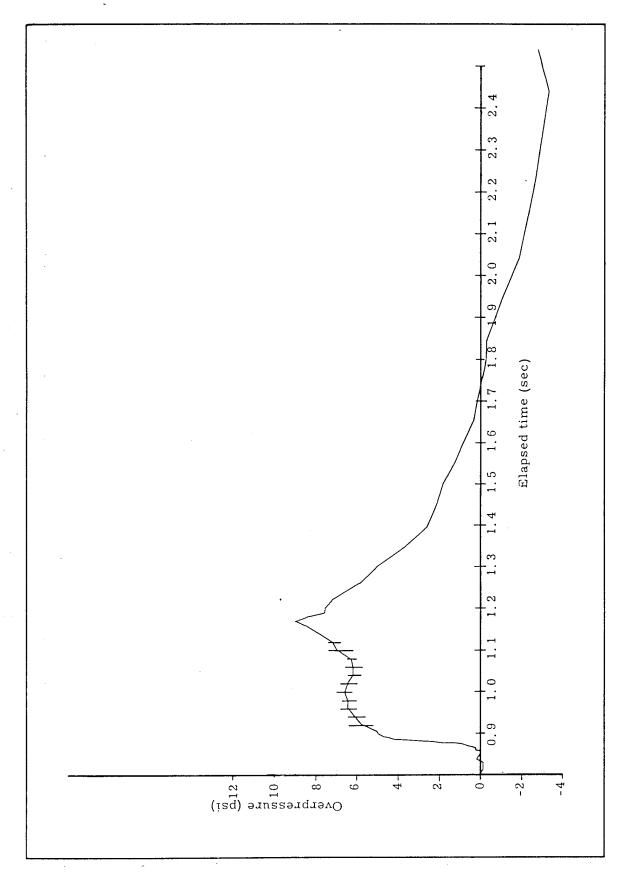


Fig. 62. -- Shot Easy (E2S) (ground baffle) (distance from ground zero: 2,031 ft)

Fig. 63. -- Shot Easy (B2PO) (ground baffle) (distance from ground zero: 2,031 ft)




c1

0

Overpressure (psi)

127

10-

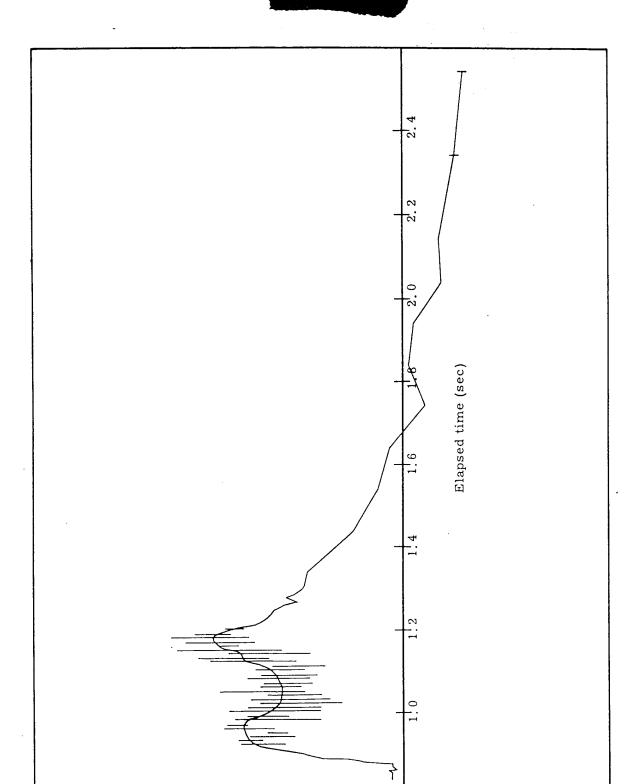

4-

Overpressure (psi)

12-

2-

Fig. 64. -- Shot Easy (B2P5) (gauge 5 ft above ground) (distance from ground zero: 2,031 ft)



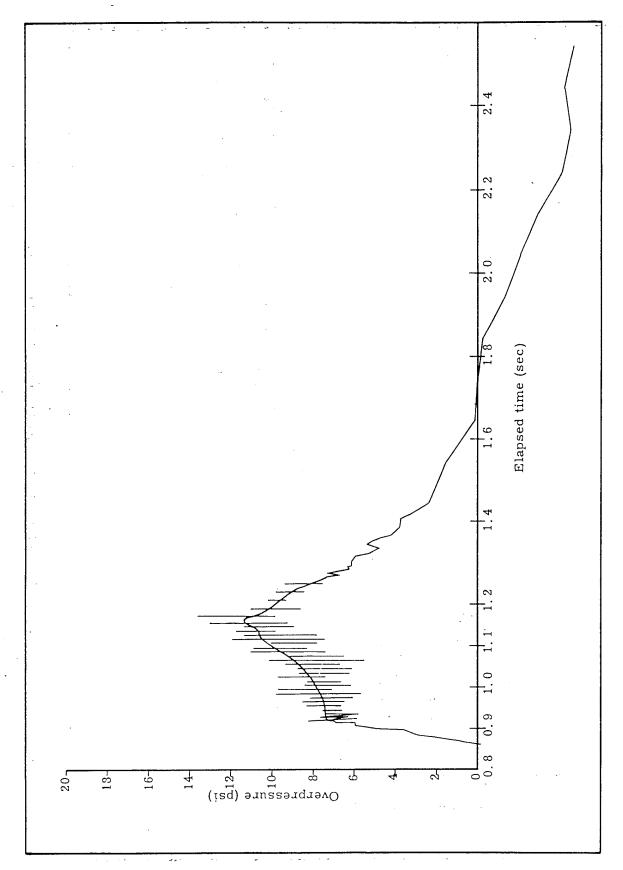



Fig. 65. -- Shot Easy (B2P10) (gauge 10 ft above ground) (distance from ground zero: 2,031 ft)





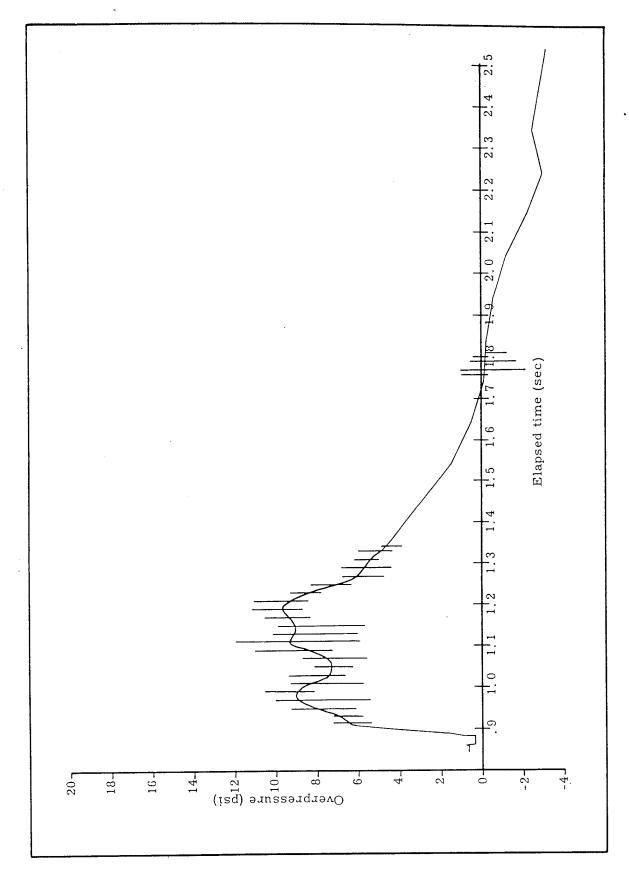


Fig. 66. -- Shot Easy (B2P25) (gauge 25 ft above ground) (distance from ground zero: 2,031 ft)





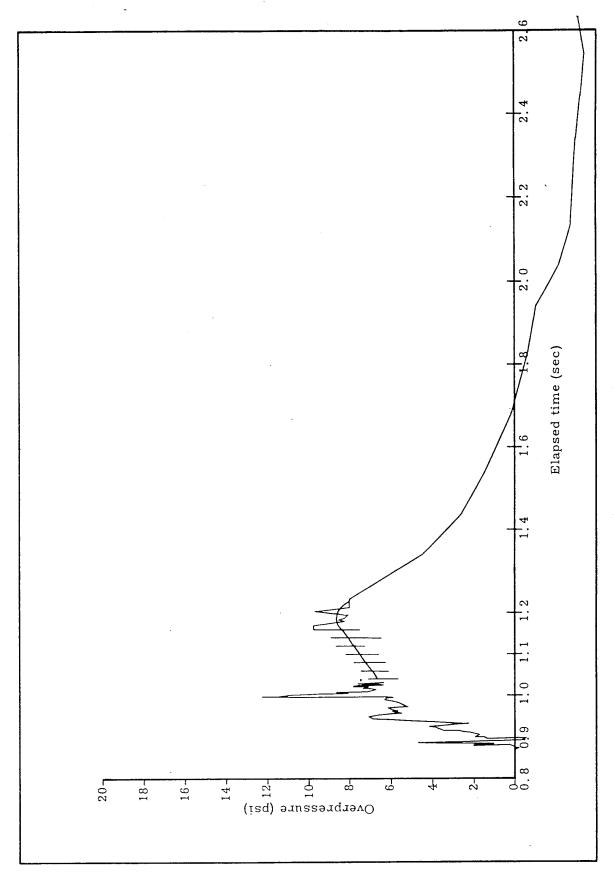



Fig. 67. -- Shot Easy (B2P50) (gauge 50 ft above ground) (distance from ground zero: 2,031 ft)



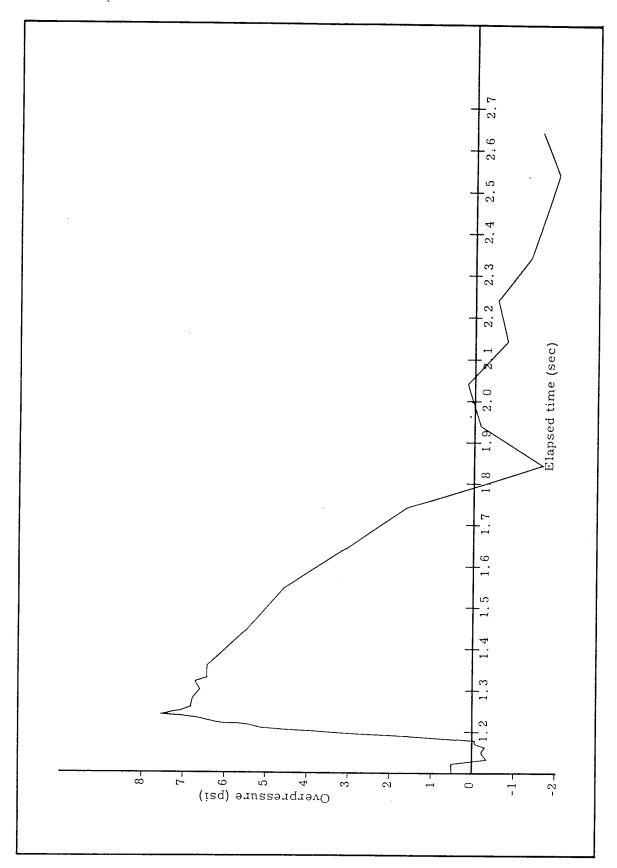


Fig. 68. -- Shot Easy (CS) (ground baffle) (distance from ground zero: 2,505 ft)



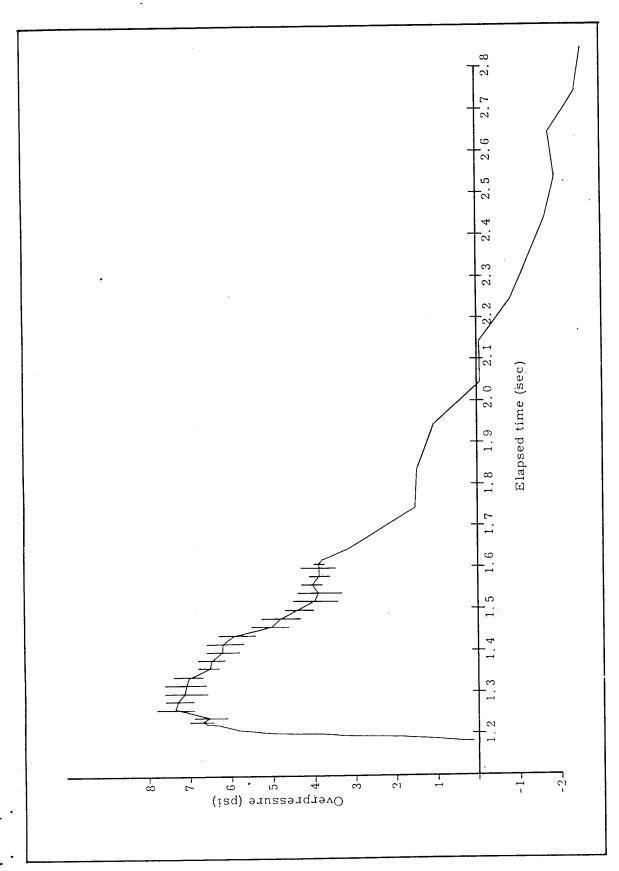



Fig. 69. -- Shot Easy (C15R) (gauge 15 ft above ground) (distance from ground zero: 2,505 ft)



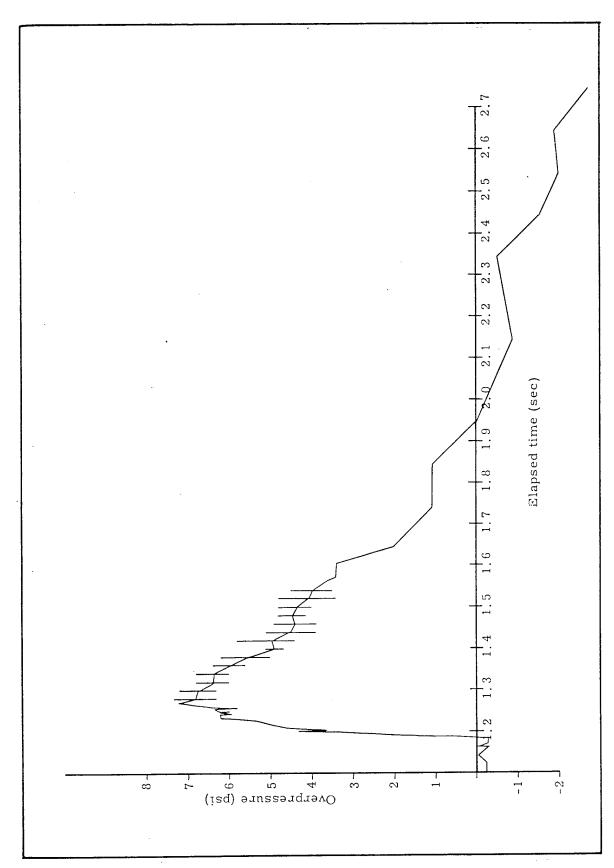


Fig. 70. -- Shot Easy (C15L) (gauge 15 ft above ground) (distance from ground zero: 2,505 ft)



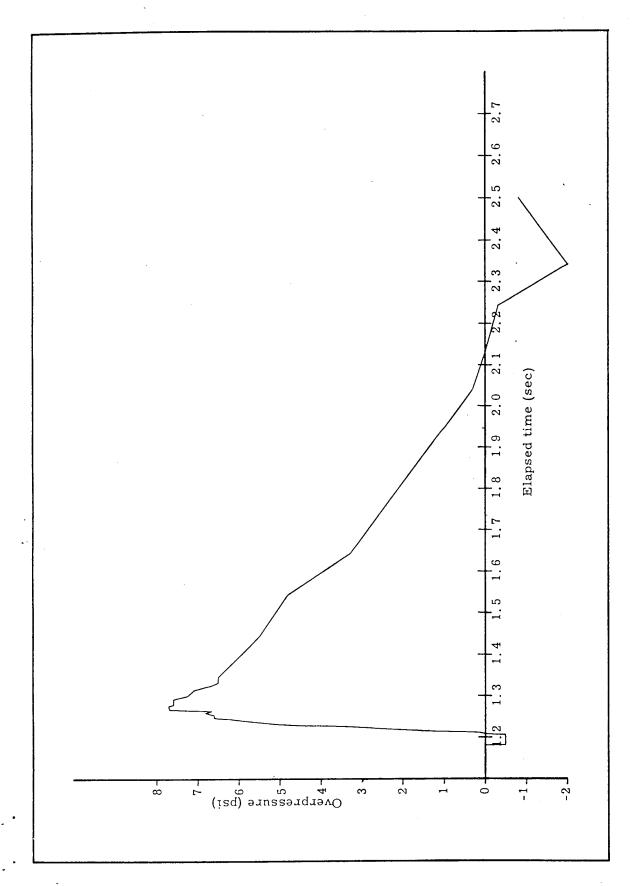


Fig. 71. -- Shot Easy (B3S) (ground baffle) (distance from ground zero: .2, 541 ft)



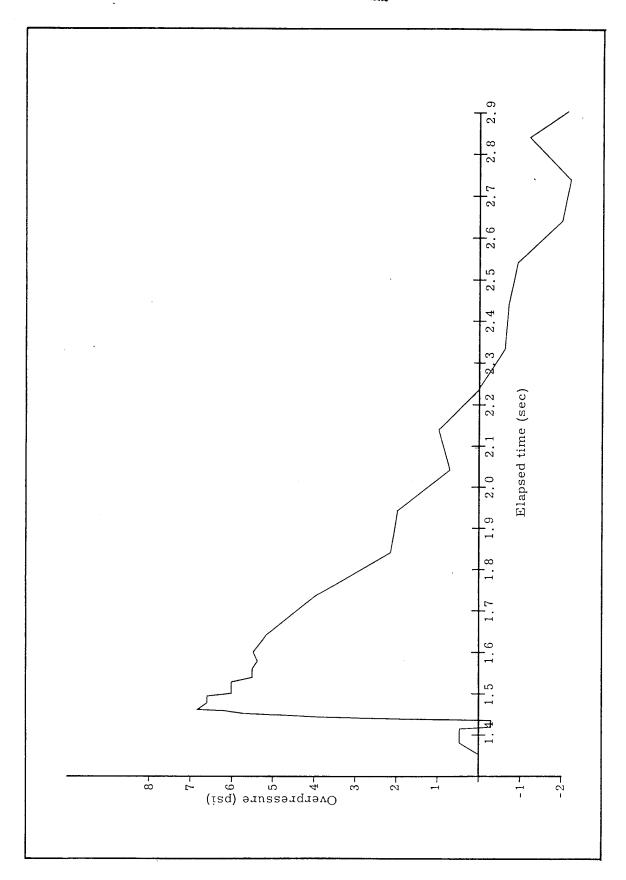


Fig. 72. -- Shot Easy (A3S) (ground baffle) (distance from ground zero: 2,873 ft)



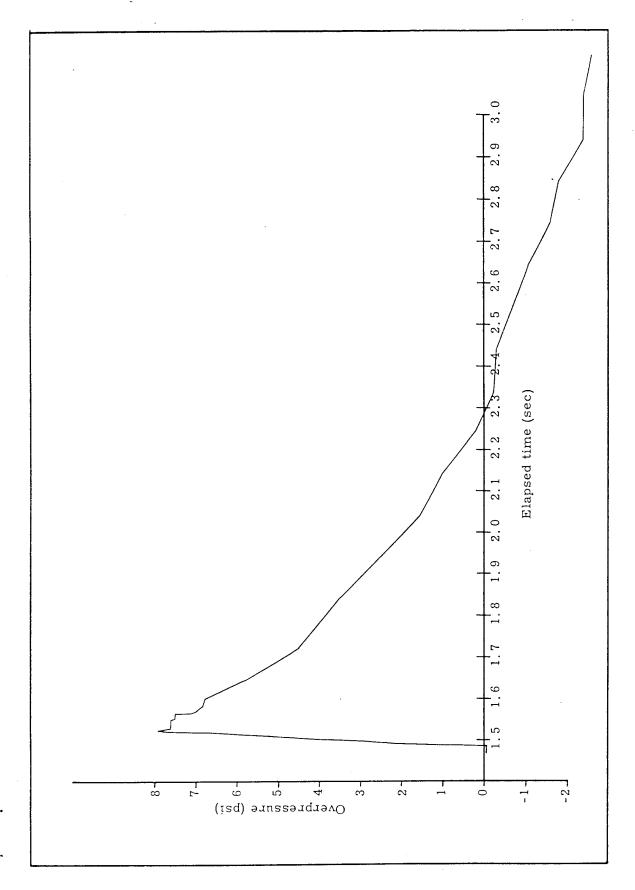


Fig. 73. -- Shot Easy (DS) (ground baffle) (distance from ground zero: 2,910 ft)





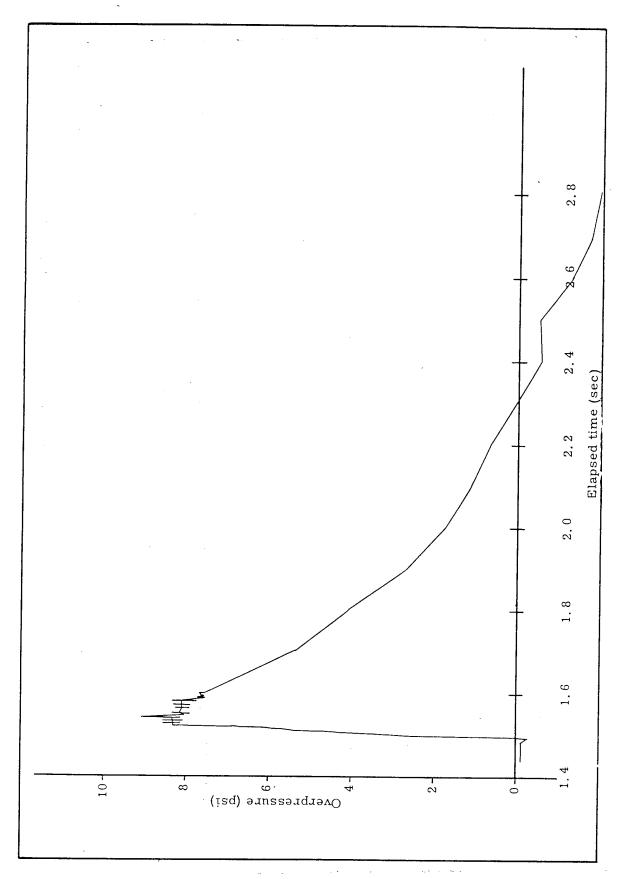


Fig. 74. -- Shot Easy (DPO) (ground baffle) (distance from ground zero: 2,910 ft)



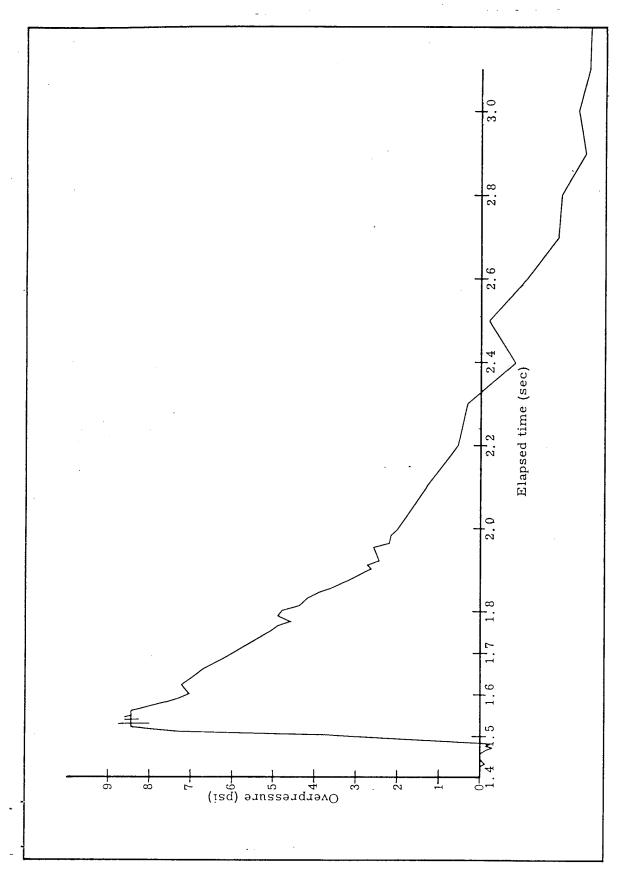


Fig. 75. -- Shot Easy (DP5) (gauge 5 ft above ground) (distance from ground zero: 2,910 ft)





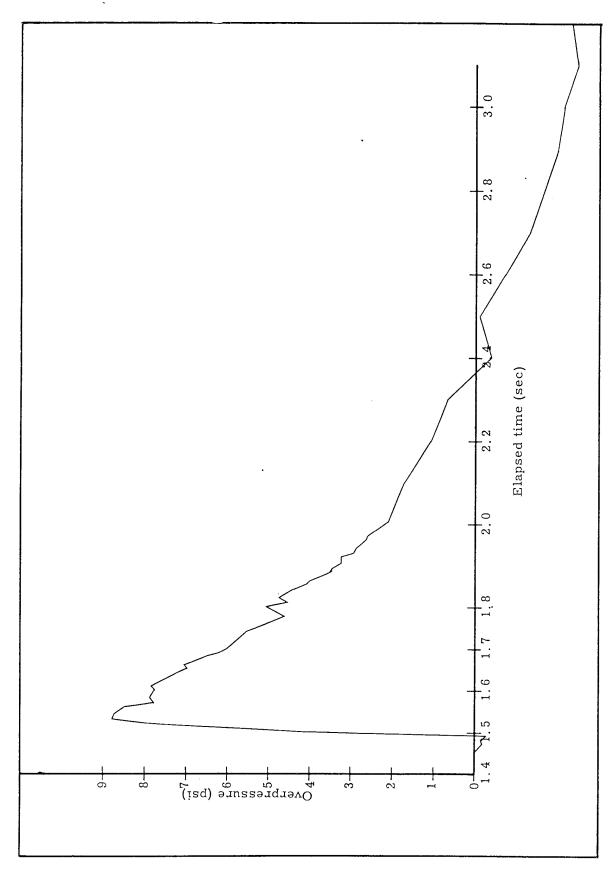



Fig. 76. -- Shot Easy (DP10) (gauge 10 ft above ground) (distance from ground zero: 2,910 ft)



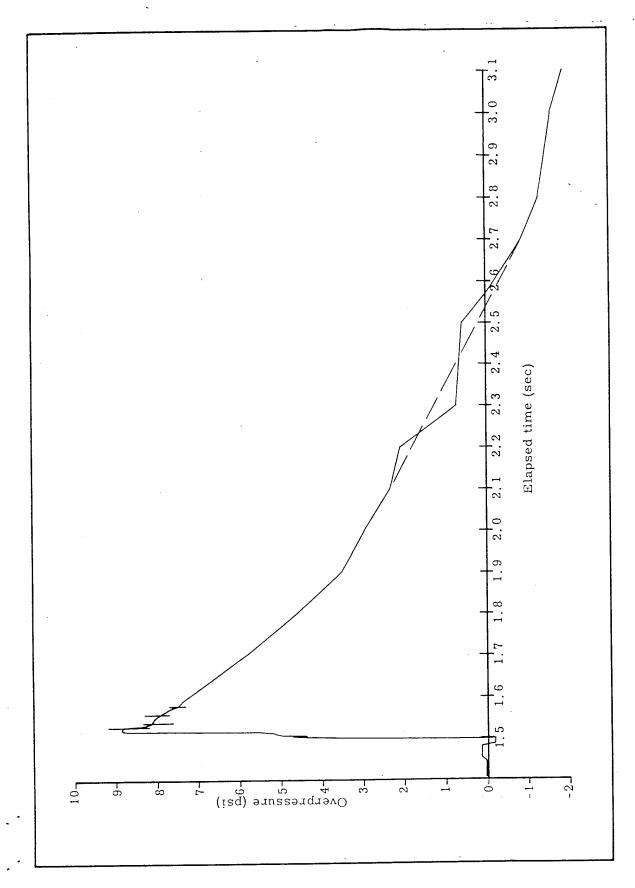



Fig. 77. -- Shot Easy (DP25) (gauge 25 ft above ground) (distance from ground zero: 2,910 ft)



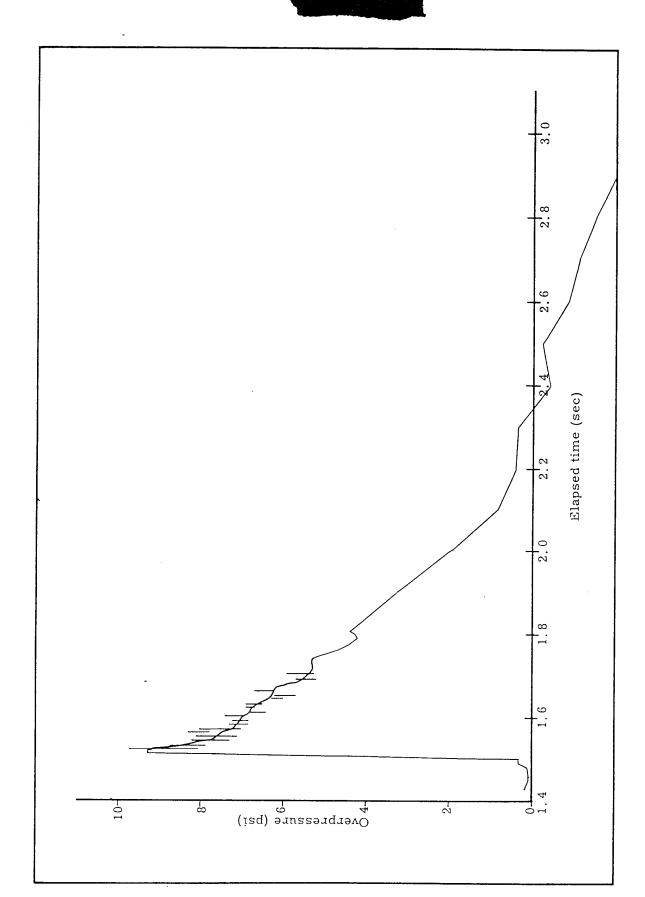


Fig. 78. -- Shot Easy (DP50) (gauge 50 ft above ground) (distance from ground zero: 2,910 ft)




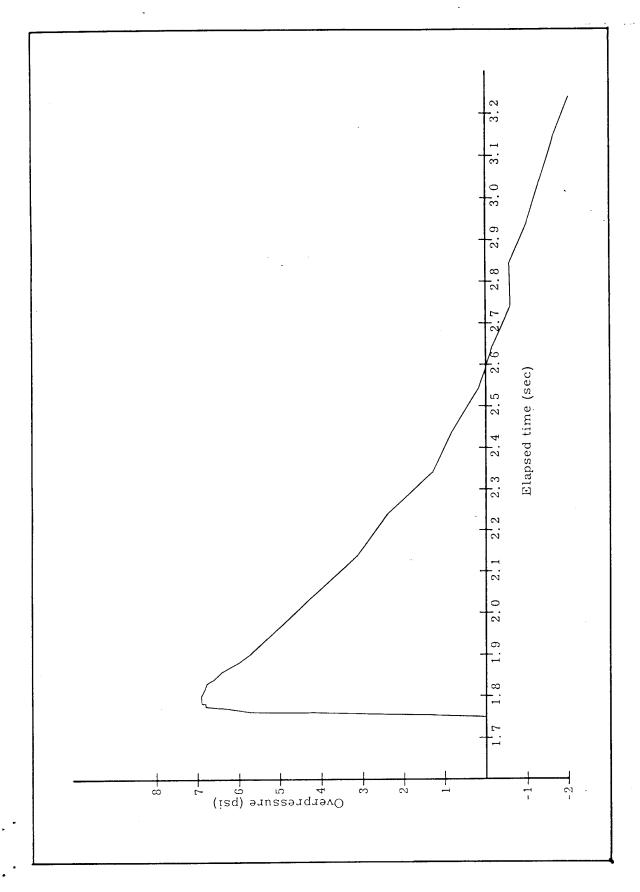


Fig. 79. -- Shot Easy (ES) (ground baffle) (distance from ground zero: 3,270 ft)

THE PART OF THE PA

:

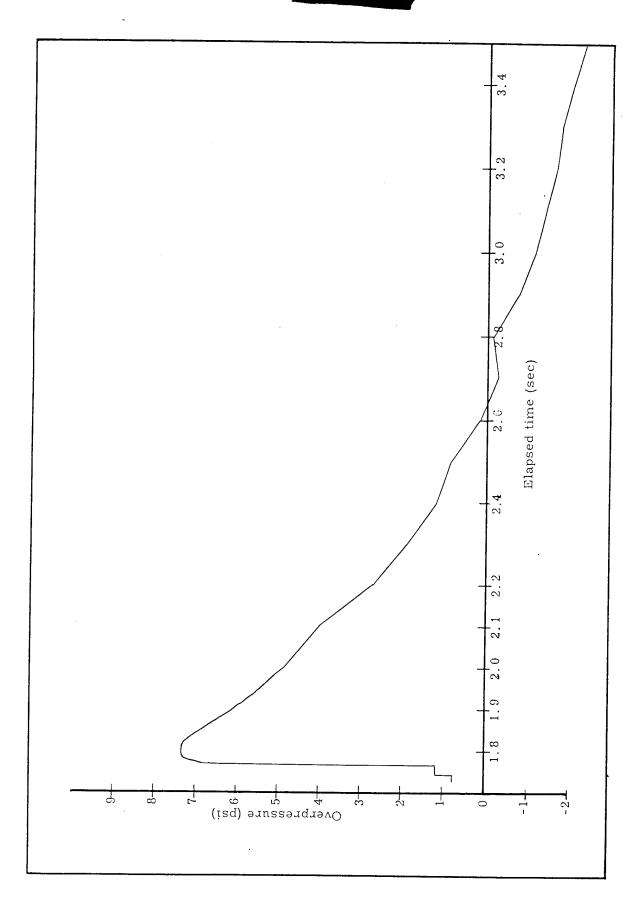

A Marie Control

Fig. 80 -- Shot Easy (E15L) (gauge 15 ft above ground) (distance from ground zero: 3,270 ft)



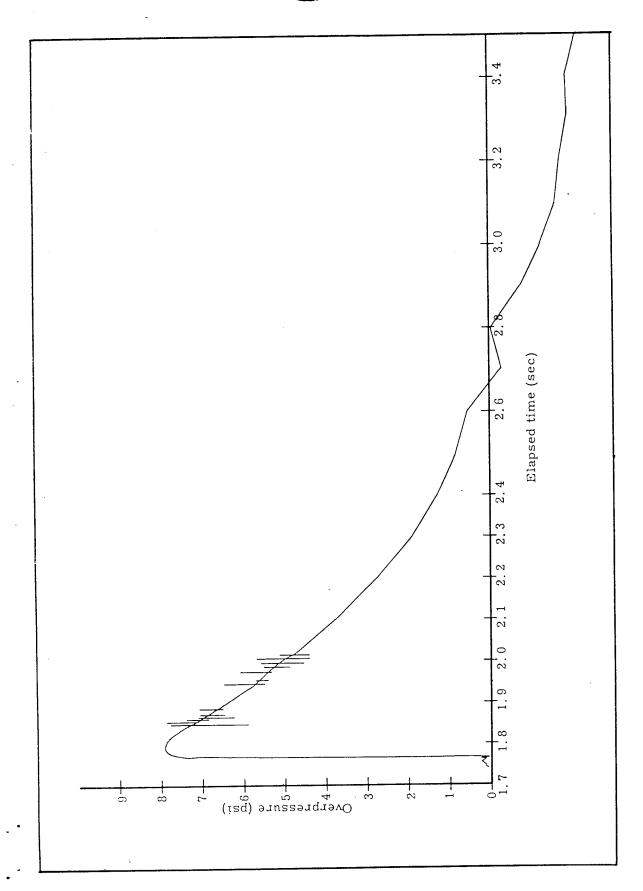



Fig. 81. -- Shot Easy (E15R) (gauge 15 ft above ground) (distance from ground zero: 3,270 ft)

大学,我们就是一个时间,我们就是一个时间,我们就是一个时间,我们就是一个时间,我们就是一个时间,我们就是一个时间,我们就是一个时间,我们就是一个时间,我们就是一



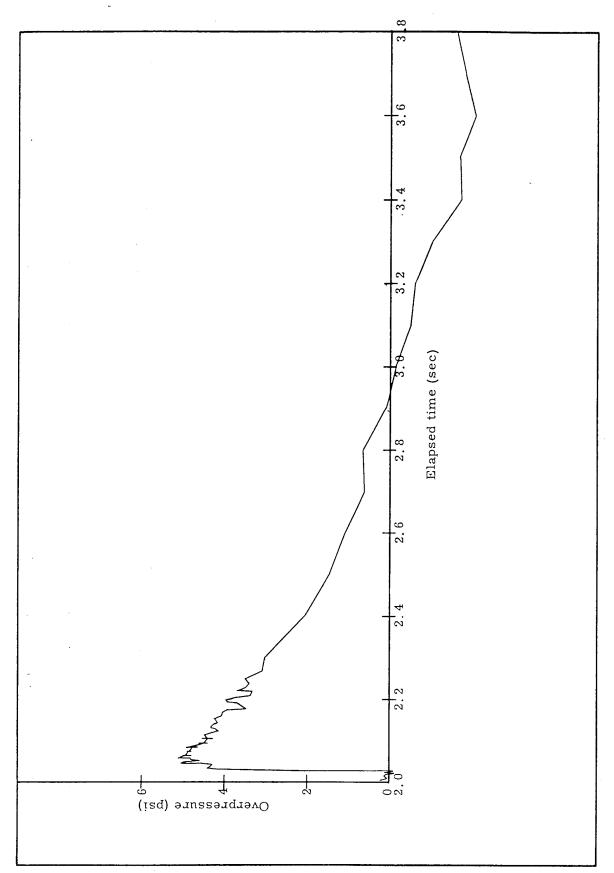


Fig. 82. -- Shot Easy (FS) (ground baffle) (distance from ground zero: 3,630 ft)



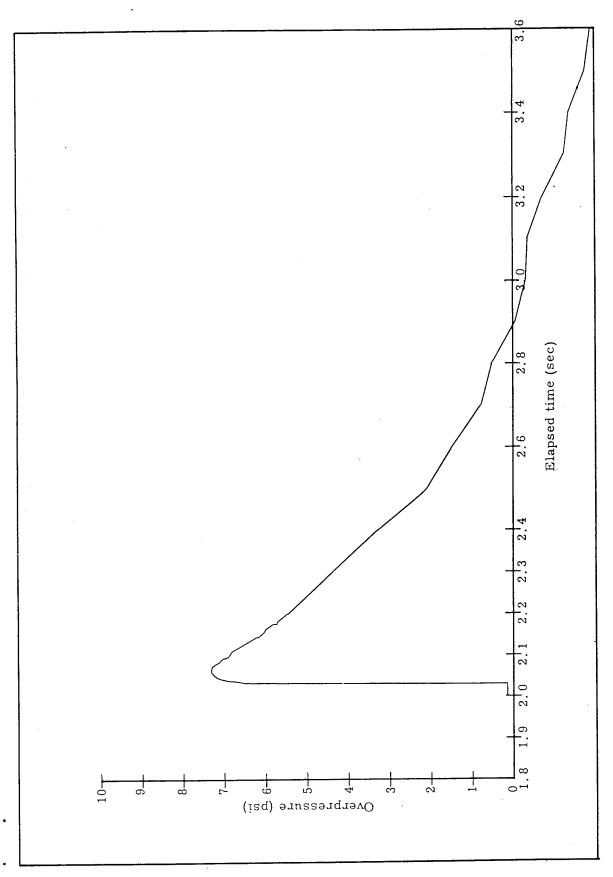


Fig. 83. -- Shot Easy (F15R) (gauge 15 ft above ground) (distance from ground zero: 3,630 ft)

A CONTRACT OF THE CONTRACT OF

THE STATE OF THE PROPERTY OF T



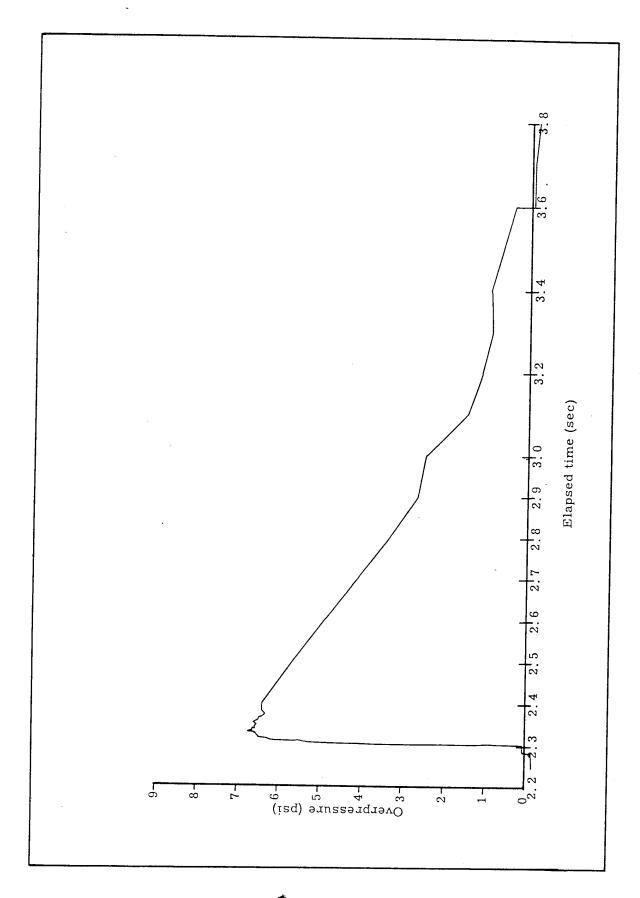


Fig. 84. -- Shot Easy (GS) (ground baffle) (distance from ground zero: 3,995 ft)



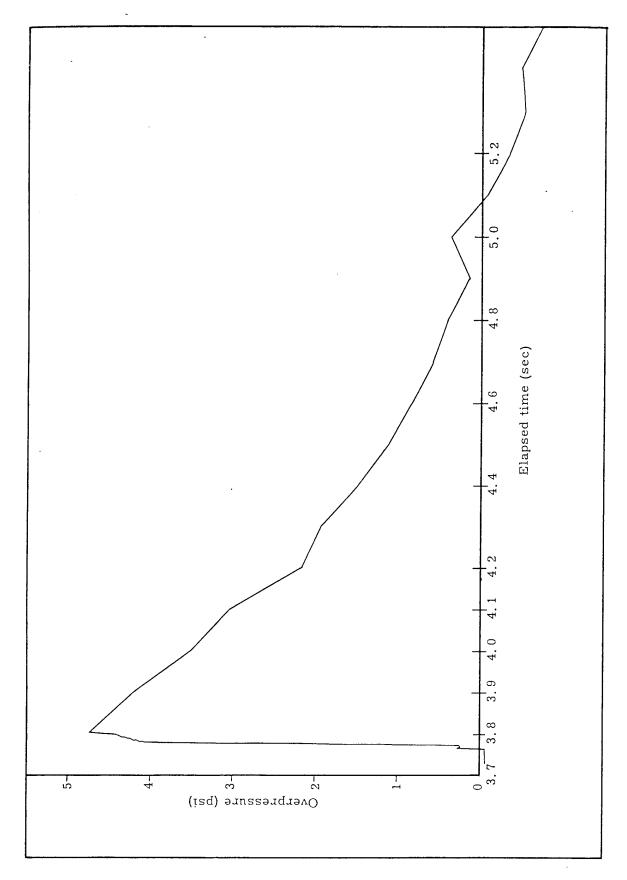


Fig. 85. -- Shot Easy (IS) (ground baffle) (distance from ground zero: 5,860 ft)

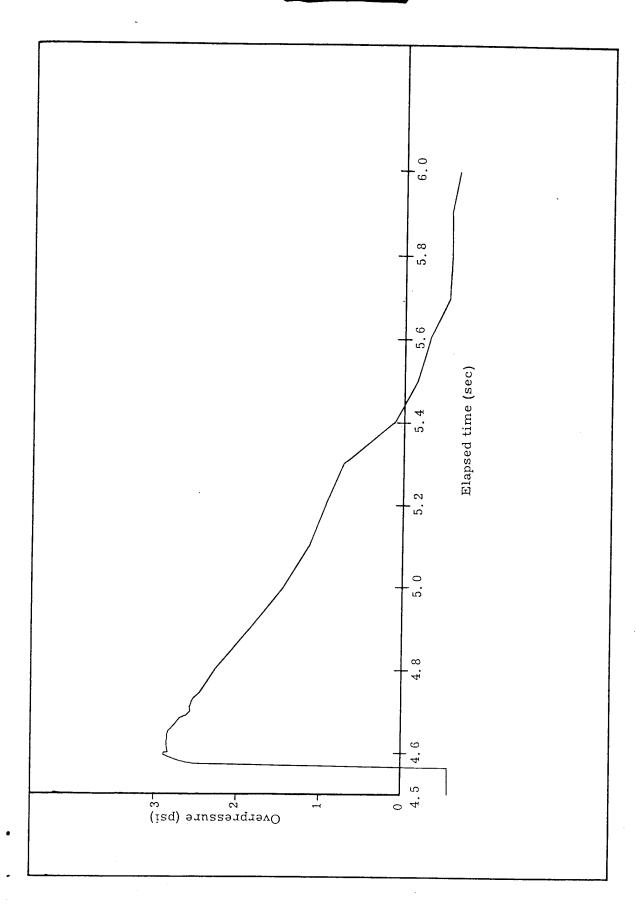


Fig. 86. -- Shot Easy (JS) (ground baffle) (distance from ground zero: 6,250 ft)



# Appendix B to: Operation Buster Some Measurements of Overpressure-Time vs Distance for Airburst Bombs

The recording system consisted mainly of three commercially available items:

- 1. Wiancko pressure gauges manufactured by the Wiancko Engineering Company of Pasadena, California. A description of these gauges can be found in Greenhouse Report Annex 3.4, Part 1.
- 2. Carrier-Amplifier System D manufactured by the Consolidated Engineering Corporation. This system employs a 3 kc/sec carrier, permitting flat response from zero to 500 cps. The rise time (including the galvanometer, Consolidated type 7-223) when a step transient is applied through the system is slightly faster than one msec.
- 3. Type 5-114 18-channel recording oscillographs manufactured by the Consolidated Engineering Corporation.

All the equipment was operated on 110 volts a-c except one of the recording oscillographs, which was battery-powered.

#### LIST OF REFERENCES

- Porzel, F. B. and Reines, F., <u>Height of Burst for Atomic Bombs</u>, Los Alamos report LA-743R, August 1949
- Pelsor, G. T., Overpressure Expected from an A-Bomb Burst Over a Rigid Plane, Sandia Corporation report SC-1516(TR), July 1950
- 3. The Capabilities of Atomic Weapons, Armed Forces Special Weapons Project report AFSWP-Q-21, July 1951
- 4. An Analysis of the Strategic Uses of the Airburst Bomb with Special Reference to the Fuzing Problem, Sandia Corporation report SC-1827(TR), May 1951
- 5. Harding, J. M., Fixed Distance Blast Pressure Variation with Small Altitude, Buster-Jangle report WT-305, April 3, 1952
- Merritt, M. L., <u>Some Measurements of Terrain Effects on Blast Waves</u>, Buster-Jangle report WT-301, February 12, 1952
- 7. White, D. R., An Experimental Survey of the Mach Reflection of Shock Waves, Princeton University Technical report II-10, August 21, 1951
- 8. Effects of Atomic Weapons, prepared by the Los Alamos Scientific Laboratory, U. S. Government Printing Office, 1950, Fig. 3.40a
- 9. Operation Greenhouse, Report Number 28, Annex 1.6 Part VI -- Pressure Versus Time in Mach Region (to be published)
- Memorandum, Porzel, F. B., Los Alamos Scientific Laboratory, and Pelsor, G. T., Sandia Corporation, to Bradbury, N. E., Los Alamos Scientific Laboratory, <u>The Implication of the Buster-Jangle Blast Measurements</u>, January 23, 1952
- 11. Northrop, P. A., <u>Instrumentation of Structures Program</u>, Scientific Director's report on Operation Greenhouse, WT-1(Annex 3.4, Part 1) January 1951

#### INITIAL DISTRIBUTION

#### ATOMIC ENERGY COMMISSION

1-3/300A Atomic Energy Commission, Washington, Attn: DMA
4-23/300A Los Alamos Scientific Laboratory, Report Library
24-45/300A Sandia Corporation
46/300A Weapon Test Reports Group, TIS, USAEC, Washington
264-300/300A Technical Information Service, Oak Ridge (surplus)

# DEPARTMENT OF DEFENSE (thru TIS, Oak Ridge)

47/300A Chairman, Research and Development Board
48/300A Director, Weapons System Evaluations Group, Office of the Secretary of Defense
49/300A Executive Director, Committee on Atomic Energy, Research and Development Board (Beckler)
50/300A Executive Director, Committee on Medical Sciences, Research and Development Board

### AFSWP ACTIVITIES (direct)

51-59/300A Chief, Armed Forces Special Weapons Project, Washington 60-62/300A Commanding General, Field Command, Armed Forces Special Weapons Project, Albuquerque 63-65/300A Commanding Officer, Test Command, Armed Forces Special Weapons Project, Albuquerque

### ARMY ACTIVITIES (thru TIS, Oak Ridge)

66/300A Assistant Chief of Staff, G-1
67/300A Assistant Chief of Staff, G-2
68-71/300A Assistant Chief of Staff, G-3
72-76/300A Assistant Chief of Staff, G-4
77-79/300A Chief of Ordnance
80-83/300A Chief Chemical Officer
84-86/300A Quartermaster General
92-93/300A Chief of Transportation
94-96/300A Chief Signal Officer
97-100/300A Surgeon General








# ARMY ACTIVITIES (Cont) (thru TIS, Oak Ridge)

104-107/300A 108/300A 109/300A 110/300A 111/300A 112-113/300A 114-115/300A	Provost Marshal General Chief, Army Field Forces President, Army Field Forces Board No. 1, Fort Bragg President, Army Field Forces Board No. 2, Fort Knox President, Army Field Forces Board No. 3, Fort Benning President, Army Field Forces Board No. 4, Fort Bliss Commandant, Infantry School, Fort Benning Commandant, Armored School, Fort Knox President, Artillery School Board, Fort Sill		
118-119/300A	Commandant, AA&GM Branch, Artillery School, Fort Bliss		
120-121/300A	Commandant, Army War College		
122-123/300A	Commandant, Command and General Staff College, Fort		
	Leavenworth		
	Commandant, Army General School, Fort Riley		
	Commanding General, First Army, Governor's Island		
	Commanding General, Second Army, Fort George G. Meade		
	Commanding General, Third Army, Fort McPherson		
·	Commanding General, Fourth Army, Fort Sam Houston		
	Commanding General, Fifth Army, Chicago		
	Commanding General, Sixth Army, Presidio of San Francisco		
	Commander-in-Chief, European Command		
· ·	Commander-in-Chief, Far East		
	Commanding General, U. S. Army, Pacific		
	Commanding General, U. S. Army, Caribbean		
·	Commanding General, U. S. Army, Alaska		
	Operations Research Office (Johns Hopkins University)		
	Commanding Officer, Ballistic Research Laboratories		
151-152/300A	Commanding Officer, Engineer Research and Development Laboratory		
153-154/300A	Commanding Officer, Signal Corps Engineering Laboratory, Fort Monmouth		
155-156/300A	Commanding Officer, Evans Signal Laboratory		
157-158/300A	Commanding General, Army Chemical Center, Chemical and Radiological Laboratory		

### NAVY ACTIVITIES (thru TIS, Oak Ridge)

159-160/300A	Chief of Naval Operations, Op-36
161-164/300A	Chief, Bureau of Ships
165/300A	Chief, Bureau of Ordnance
166-167/300A	Chief, Bureau of Medicine and Surgery
168-169/300A	Chief, Bureau of Aeronautics
170-171/300A	Chief, Bureau of Supplies and Accounts
172-174/300A	Chief, Bureau of Yards and Docks
175/300A	Chief of Naval Personnel
176-178/300A	Commandant of the Marine Corps
179/300A	Commander-in-Chief, U. S. Pacific Fleet







### INITIAL DISTRIBUTION (Cont)

### NAVY ACTIVITIES (Cont) (thru TIS, Oak Ridge)

180/300A	Commander-in-Chief, U. S. Atlantic Fleet
181/300A	President, U. S. Naval War College, Newport
182-183/300A	Commandant, Marine Corps Schools, Quantico
184-185/300A	Chief of Naval Research
186/300A	Commander, U. S. Naval Ordnance Laboratory
187/300A	Commander, U. S. Naval Ordnance Laboratory (Aliex)
188/300A	Director, U. S. Naval Research Laboratory
189/300A	Commanding Officer and Director, U. S. Naval Electronics
	Laboratory
190-193/300A	Commanding Officer, U. S. Naval Radiological Defense Laboratory
194/300A	Commanding Officer and Director, David W. Taylor Model
101,00011	Basin
195/300A	Commander, Naval Material Laboratory
196-197/300A	Officer-in-Charge, U. S. Naval Civil Engineering Research and
	Evaluation Laboratory
198/300A	Commander, U. S. Naval Ordnance Test Station, Inyokern
199/300A	Commanding Officer, U. S. Naval Medical Research Institute

## AIR FORCE ACTIVITIES (thru TIS, Oak Ridge)

200-201/300A 202-203/300A	Assistant for Atomic Energy Director of Operations, Operations Analysis Division		
204/300A	Director of Plans (AFORD-Pl)		
	Director of Requirements		
206-207/300A	Director of Research and Development		
208-209/300A	Director of Intelligence (Phys. Vul. Branch, Air Targets Di-		
	vision)		
	Director of Installations		
211/300A	Assistant for Development Planning		
212/300A	Assistant for Materiel Program Control		
213/300A	Surgeon General		
214-216/300A	Commanding General, Strategic Air Command, Offutt Air Force Base		
217-226/300A	Commanding General, Air Research and Development Command		
227-228/300A	Commanding General, Air Materiel Command, Wright-Patterson Air Force Base		
229-230/300A	Commanding General, Air Materiel Command, Wright-Patterson		
	Air Force Base, Air Installations Division		
231-233/300A	Commanding General, Tactical Air Command, Langley Air Force Base		
234-236/300A	Commanding General, Air Defense Command, Ent Air Force Base		
237-238/300A	Commanding General, Air Proving Ground, Eglin Air Force Base		
239-241/300A	Commanding General, Air Training Command, Scott Air Force		
	Raco		
	FROM A CONTRACTOR		





#### INITIAL DISTRIBUTION (Cont)

# AIR FORCE ACTIVITIES (Cont) (thru TIS, Oak Ridge)

242-244/300A	Commanding General,	Air University, Maxwell Air Force Base Special Weapons Center, Kirtland Air
	Force Base	•
248/300A	Commanding General	1009th Special Weapons Squadron Wright Air Development Center, Wright-
	Patterson Air For	ce Base
253-254/300A	Commanding General,	U. S. Air Forces in Europe
255-256/300A	Commanding General,	U. S. Air Forces, Far East Air Forces Cambridge Research Center
257-258/300A 259/300A	Commanding General,	Air Force Missile Center, Patrick Air
	Force Base	
260/300A		of Aviation Medicine, Randolph Air Force
001 000/2004	Base RAND Corporation	
261-262/300A 263/300A	Assistant to the Specia	al Assistant Chief of Staff (Griggs)



